



# mydmx GO

## CLASSIC

### User Manual

©2026 ADJ Products, LLC all rights reserved. Information, specifications, diagrams, images, and instructions herein are subject to change without notice. ADJ Products, LLC logo and identifying product names and numbers herein are trademarks of ADJ Products, LLC. Copyright protection claimed includes all forms and matters of copyrightable materials and information now allowed by statutory or judicial law or hereinafter granted. Product names used in this document may be trademarks or registered trademarks of their respective companies and are hereby acknowledged. All non-ADJ Products, LLC brands and product names are trademarks or registered trademarks of their respective companies.

**ADJ Products, LLC** and all affiliated companies hereby disclaim any and all liabilities for property, equipment, building, and electrical damages, injuries to any persons, and direct or indirect economic loss associated with the use or reliance of any information contained within this document, and/or as a result of the improper, unsafe, insufficient and negligent assembly, installation, rigging, and operation of this product.

**Europe Energy Saving Notice**

Energy Saving Matters (EuP 2009/125/EC)

Saving electric energy is a key to help protecting the environment. Please turn off all electrical products when they are not in use. To avoid power consumption in idle mode, disconnect all electrical equipment from power when not in use. Thank you!

**DOCUMENT VERSION**



Due to additional product features and/or enhancements, an updated version of this document may be available online. Please check [www.adj.com](http://www.adj.com) for the latest revision/update of this manual before beginning installation and/or programming.

Date	Document Version	iOS Version	Android Version	Notes
02/22/2019	1.0	1.02	0.5.7	Initial Release
02/20/2026	1.1	N/C	N/C	Re-released as MyDMX Go Classic; Updated General Info, Specifications

# CONTENTS

<b>General Information</b>	<b>4</b>
<b>Safety Guidelines</b>	<b>5</b>
<b>Overview</b>	<b>7</b>
<b>Installation</b>	<b>8</b>
<b>Setup Instructions</b>	<b>9</b>
Connecting Power	9
Downloading the App	10
Getting Started	11
Connecting to a DMX Interface	12
<b>App Instructions</b>	<b>13</b>
Creating a New Project	13
Adding Fixtures	13
Addressing Features	14
Changing the Order of Fixtures	14
Controlling with the Faders	15
Setting Pan/Tilt Limitations	16
Live Screen	17
Colors	19
Choosing an Effect	19
Setting a Color	19
Moves	20
Choosing an Effect	20
Setting the Center Position	20
Flash FX	21
Special FX	21
Strobe	22
Dimmer	22
Presets	22
Pulse	23
Sync	23
BPM - Tap	24
BPM - Ableton Link	24
MIDI	25
Other Settings	26
<b>Trouble Shooting Tips</b>	<b>27</b>
<b>Specifications</b>	<b>28</b>
<b>Optional Accessories</b>	<b>28</b>
<b>Dimensional Drawings</b>	<b>29</b>

# GENERAL INFORMATION

## INTRODUCTION

Please read and understand all instructions in this manual carefully and thoroughly before attempting to operate these products. These instructions contain important safety and use information.

## UNPACKING

This device has been thoroughly tested and has been shipped in perfect operating condition. Carefully check the shipping carton for damage that may have occurred during shipping. If the carton appears to be damaged, carefully inspect the device for damage and be sure all accessories necessary to operate the device have arrived intact. In the event damage has been found or parts are missing, please contact our customer support team for further instructions. Please do not return this device to your dealer without first contacting customer support at the number listed below. Please do not discard the shipping carton in the trash. Please recycle whenever possible.

## CUSTOMER SUPPORT

Contact ADJ Service for any product related service and support needs. Also visit [forums.adj.com](https://forums.adj.com) with questions, comments or suggestions.

**Parts:** To purchase parts online visit:

<http://parts.adj.com> (US)

<http://www.adjparts.eu> (EU)

**ADJ SERVICE USA - Monday - Friday 8:00am to 4:30pm PST**

Voice: 800-322-6337 | [support@adj.com](mailto:support@adj.com)

**ADJ SERVICE EUROPE - Monday - Friday 08:30 to 17:00 CET**

Voice: +31 45 546 85 60 | [support@adj.eu](mailto:support@adj.eu)

**ADJ PRODUCTS LLC USA**

6122 S. Eastern Ave. Los Angeles, CA. 90040

323-582-2650 | [www.adj.com](http://www.adj.com) | [info@adj.com](mailto:info@adj.com)

**ADJ SUPPLY Europe B.V**

Junostraat 2 6468 EW Kerkrade, The Netherlands

+31 (0)45 546 85 00 | [www.adj.eu](http://www.adj.eu) | [info@adj.eu](mailto:info@adj.eu)

**ADJ PRODUCTS GROUP Mexico**

AV Santa Ana 30 Parque Industrial Lerma, Lerma, Mexico 52000

+52 (728) 282-7070

## LIMITED WARRANTY

For up-to-date warranty information regarding your device, please visit ADJ's warranty information page online or scan the QR codes below.



USA: <https://www.adj.com/pages/warranty-information>



EU: [https://www.adj.eu/terms\\_and\\_conditions](https://www.adj.eu/terms_and_conditions)

It is strongly recommended to power the fixture down completely when not in use. Doing so will reduce wear on the fixture due to sustained or extended operational periods, thereby maximizing its operational lifespan.

# SAFETY GUIDELINES

To guarantee a smooth operation, it is important to follow all instructions and guidelines in this manual. ADJ Products, LLC is not responsible for injury and/or damages resulting from the misuse of this device due to the disregard of the information printed in this manual. Only qualified and/or certified personnel should perform installation of this device and only the original rigging parts included with this device should be used for installation. Any modifications to the device and/or the included mounting hardware will void the original manufacturer's warranty and increase the risk of damage and/or personal injury.



**THERE ARE NO USER SERVICEABLE PARTS INSIDE THIS UNIT. DO NOT ATTEMPT ANY REPAIRS YOURSELF, AS DOING SO WILL VOID YOUR MANUFACTURER'S WARRANTY. DAMAGES RESULTING FROM MODIFICATIONS TO THIS DEVICE AND/OR THE DISREGARD OF SAFETY INSTRUCTIONS AND GUIDELINES IN THIS MANUAL VOID THE MANUFACTURER'S WARRANTY AND ARE NOT SUBJECT TO ANY WARRANTY CLAIMS AND/OR REPAIRS.**



**DO NOT DISASSEMBLE UNDER ANY CONDITIONS!  
UNPLUG POWER DURING LONG PERIODS OF NON-USE  
DO NOT EXPOSE DEVICE TO HEAT OR FIRE!  
DO NOT EXPOSE DEVICE TO FLAMMABLE MATERIALS!  
DO NOT EXPOSE DEVICE TO HIGH HUMIDITY!  
DO NOT EXPOSE DEVICE TO EXTREME VIBRATIONS!**



**INDOOR / DRY LOCATIONS USE ONLY!  
DO NOT EXPOSE FIXTURE TO RAIN AND/OR MOISTURE!  
DO NOT SPILL WATER AND/OR LIQUIDS INTO OR ONTO THE DEVICE!**

**AVOID** brute force handling when transporting or operating.

**DO NOT** expose any part of the device to open flame or smoke. Keep device away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.

**DO NOT** use device in extreme and/or severe environments.

**DO NOT** operate device if power cord is frayed, crimped, damaged and/or if any of the power cord connectors are damaged, and does not insert into the device securely with ease. NEVER force a power cord connector into device. If the power cord or any of its connectors are damaged, replace it immediately with a new one of similar power rating.

Strictly use a source of AC power that complies with local building and electrical codes and has both overload and ground-fault protection. Use only the provided AC power supply and power cords and the correct connector for the country of operation. Use of the factory provided power cable is mandatory for operation in the US and Canada.

Allow free unobstructed airflow to the bottom and back of the product. Do not block the ventilation slots.

**DO NOT** use the product if the ambient temperature exceeds 50°C (122° F)

# SAFETY GUIDELINES

DO NOT attempt installation and/or operation of device without knowledge how to do so.

DO NOT permit operation by persons who are not qualified to operate this type of device.

DO NOT shake device, avoid brute force when installing and/or operating.

DO NOT operate device if the power supply cable has become frayed, crimped and/or damaged, or if any of the connectors do not insert into the device securely with ease.

DO NOT force cable connectors into device.

DO NOT remove or disassemble device, there are NO user serviceable parts inside.

ALWAYS disconnect device from main power source before cleaning.

ALWAYS be sure to use this device in an area that will allow proper ventilation.

ALWAYS disconnect power cable during long periods of non-use.

All cables should be safely routed and secured so they are not likely pinched.

Only use recommended rigging hardware as described in this guide.

Use the original packaging and materials to transport this device in for service.

This device should be serviced by qualified service personnel when:

- The power cord or plug has become damaged.
- Objects have fallen on and/or liquid has spilled into the device.
- The device has been exposed to rain and/or moisture.
- The device does not operate normally or exhibits a marked change in performance.

# OVERVIEW



- A. WiFi Antenna
- B. LED Display
- C. DMX Out Signal Indicator (1 and 2)
- D. 3-PIN DMX Out Port 2\*†
- E. 3-PIN DMX Out Port 1
- F. Dimmer Button
- G. Up/Down Buttons\*
- H. Power/USB/WiFi LED Indicators
- I. Power/USB-C Input
- J. 16 Dry Contact\*
- K. Mounting Bracket Knob
- L. Mounting Bracket

\* Not active with the myDMX GO app at this time. To activate functions or to add an additional 256 channels, visit [store.dmxsoft.com](http://store.dmxsoft.com)

† 2nd DMX output is only available when using MyDMX3 or Compu Show.

# INSTALLATION



## FLAMMABLE MATERIAL WARNING!

Keep device at least 5.0 feet (1.5m) away from any flammable materials, decorations, pyrotechnics, etc.

**DO NOT INSTALL THE DEVICE IF YOU ARE NOT QUALIFIED TO DO SO!**

The myDMX GO Classic WiFi DMX device **MUST** be installed following all local, national, and country commercial electrical and construction codes and regulations.

Ambient operating temperature range for this device is **35° to 113°F (2° to 45°C)**.

**DO NOT** use the device under or above this temperature range.

**DO NOT** install the device in areas where unauthorized personnel might reach the device.

## MINI OMEGA BRACKET / CLAMP INSTALLATION

The myDMX GO Classic WiFi DMX device can be placed on the flat surface, attached to a surface using the provided mounting bracket or attached to truss using included mini omega bracket and a properly rated clamp. (Clamp not included) (See images below)

**INSTALLATION LOCATION ON TRUSS MUST BE CLEAR OF ANY MOVING HEAD FIXTURES!**




# SETUP INSTRUCTIONS

## Connecting Power

The myDMX GO Classic WiFi DMX device is powered through the USB connection port. Power can be supplied via the provided power adapter or it can be supplied via an Android powered tablet with USB out port.


When power is connected, the Power LED indicator will remain steady while the LED indicator for USB will slowly flash.

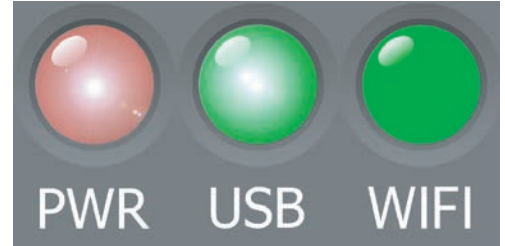


## Connecting to WiFi

When the myDMX GO Classic WiFi DMX device is powered ON for the first time, it will be configured in the default mode. The device will create and broadcast a local WiFi access point, which should be available to any WiFi equipped device.

When a device is connected via WiFi, the green LED indicator for WiFi will remain steady.

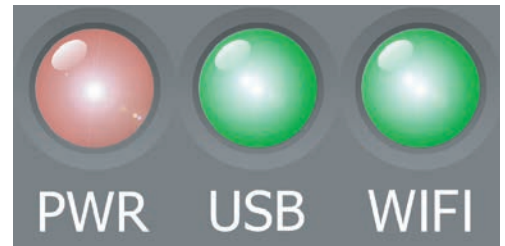

The default DMX512 network password is **smartdmx0000**.

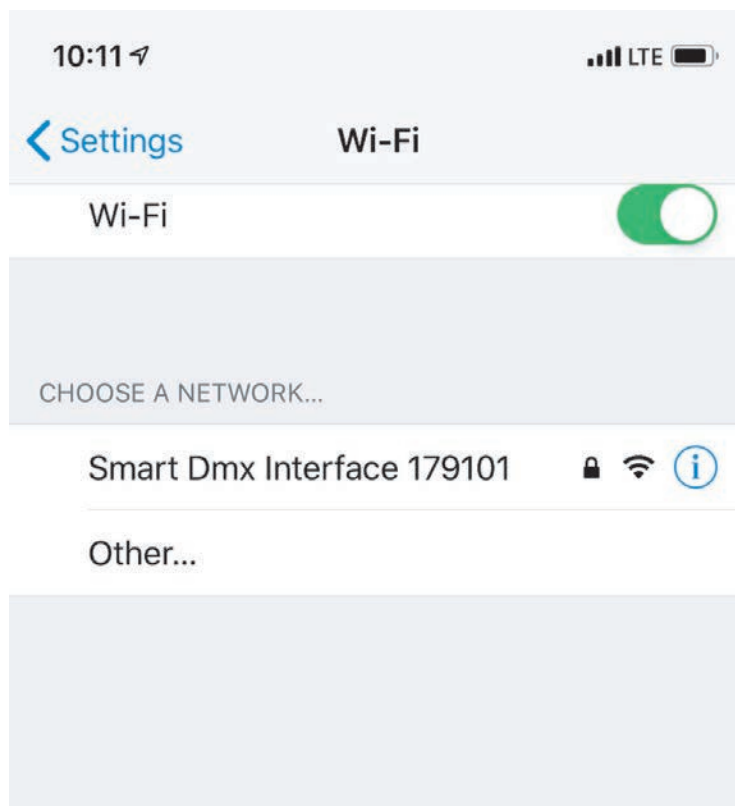


# SETUP INSTRUCTIONS

## Downloading The Application

To download the myDMX Go application for your tablet:

1. Open the Camera app on your mobile device.
2. Position your camera over the QR Code so it is visible in the camera app's viewfinder.
3. Your device will recognize the QR Code and show a notification on the screen.
4. Tap the notification to open the link to the app store for your device

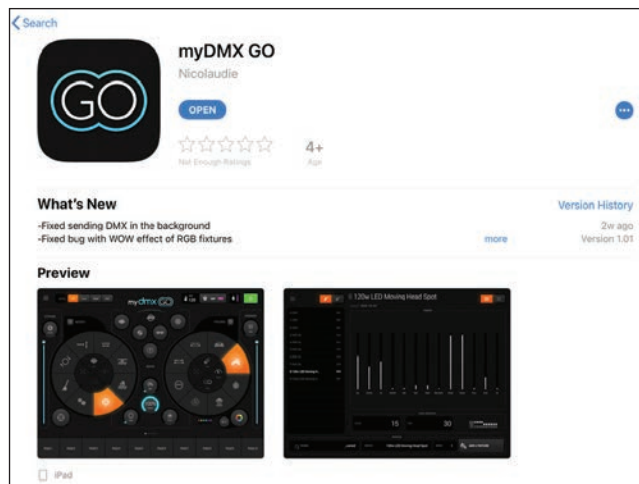

The iOS version of the App from here (iPad only, not available for iPhone or iTouch):  
<https://itunes.apple.com/us/app/mydmx-go/id1439050013?mt=8>

The Android tablet version of the App is available here:  
<https://play.google.com/store/apps/details?id=com.lightingsoft.mydmxgo>

The Amazon version of the Android App is available here:  
[https://www.amazon.com/gp/product/?ie=UTF8&ASIN=B07MBBJ1XB&ref=mas\\_ty](https://www.amazon.com/gp/product/?ie=UTF8&ASIN=B07MBBJ1XB&ref=mas_ty)

# SETUP INSTRUCTIONS

## Getting Started


Before launching the myDMX GO app, connect to the myDMX GO Classic WiFi device via WiFi (iPad and Android) or via USB (Android only).

Launch the myDMX GO app on your device. A login screen will appear and ask if you would like to login or create a Light Cloud account.

- A Light Cloud account is free and will give you the ability to synchronize your own fixture profiles across multiple tablets.

If you choose not to use a Light Cloud account, simply select “Log In Later” to proceed.

Tap the menu on the left and select your interface from the list if it is not already selected (see page 13 for instructions to connect to a DMX interface).

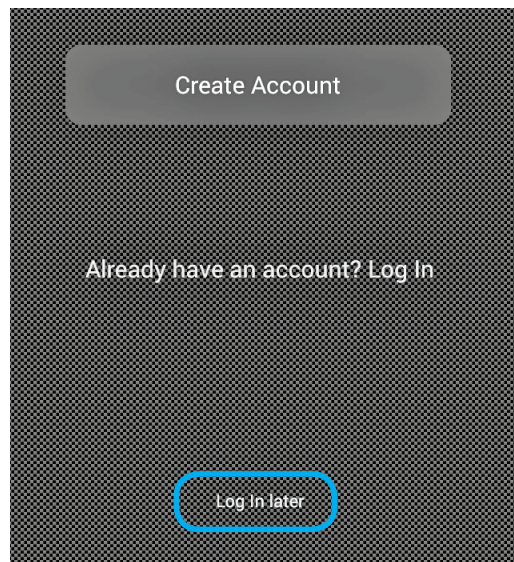

# SETUP INSTRUCTIONS

## Connecting to a DMX Interface

myDMX GO Classic has been designed for use with the myDMX GO Classic WiFi DMX device. To begin, connect to the DMX device over WiFi, then start the myDMX GO App. Note: The device may take up to 20 seconds to connect. No further purchases are required.

myDMX GO Classic can also be used with other specific devices with the correct additional purchases described below.


myDMX GO Classic for iPad:

- myDMX GO, Daslight DVC4-GZM & Sunlite SUITE2-FC Ethernet-DMX interface.

myDMX GO Classic for Android:

- Any Smart Upgrade Technology (SUT) USB-DMX interface with the myDMX GO license. See our website for a list of compatible SUT devices
- Daslight DVC4-GZM & Sunlite SUITE2-FC Ethernet-DMX interfaces

To connect to a DMX interface, tap the menu button and tap on the interface you would like to use.

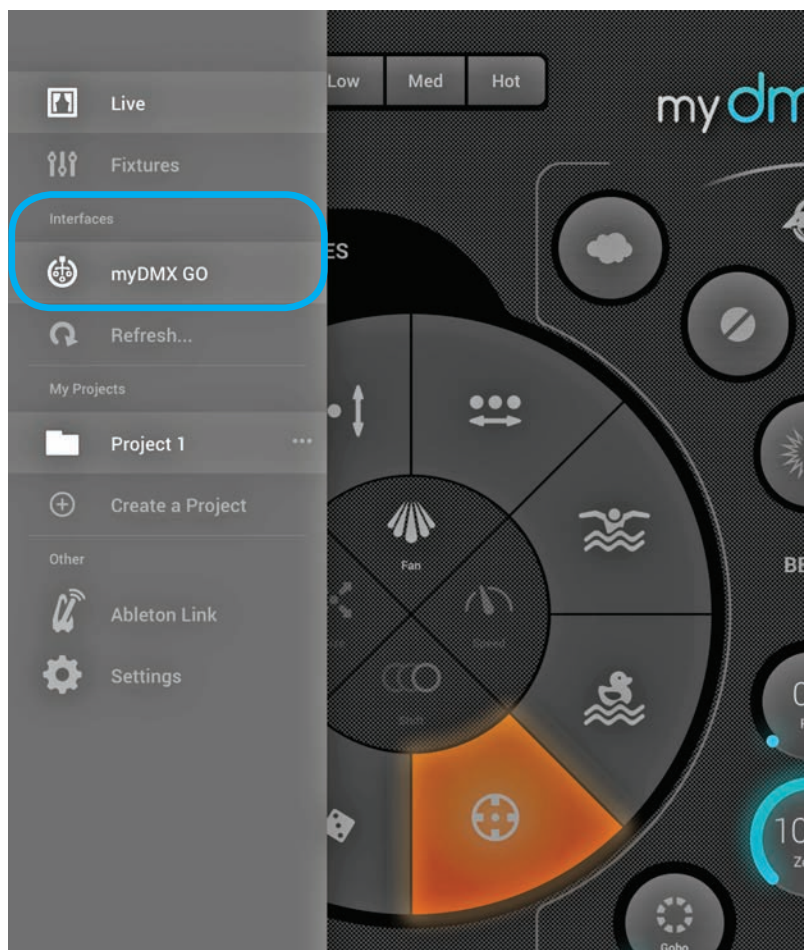

# APP INSTRUCTIONS

## Create A New Project

To create a project, tap the menu button and tap “Create a Project”. If you currently have an open project, you will have the option to copy the presets and fixtures from the current open project, or start a new project. Tapping the 3 dots next to the project name allows you to rename a project or delete it.

## Adding Fixtures

To add fixtures to your project, tap the menu button and then “Fixtures”. To add a fixture:

1. Tap the “Brand” button at the bottom of the screen and select the brand.
2. Select a device profile. Notice each profile has a colored dot to the right:
  - **Red** means the device must be downloaded from the cloud. (An Internet connection is required for this.)
  - **Green** means you have the device on your tablet already.
  - **Yellow** means you have the device on your tablet, however an updated version is available.
3. Select a “Mode”. Some fixtures have different operation modes that take up different amounts of channels. Be sure you have the same mode selected on your fixture. (To check the settings your fixture, please refer to the owner’s manual that was provided with your fixture).
4. Tap “Add A Fixture”.



\* There are over 15,000+ fixture profiles available.

If you do not see a profile for your fixture, visit <https://store.lightriderapp.com/en/ssl> to create a New Fixture Request.

# APP INSTRUCTIONS


## Addressing Features

Each DMX fixture is assigned a unique number so that myDMX GO Classic knows which fixture to send the correct information to.

To address a fixture:

1. Tap the fixture in the list and look at the Start address number
2. Use the digital display on the actual fixture to set the same number. Refer to the fixture manufacturers manual on how to do this. Some fixtures use DIP switches instead of a digital display. The correct DIP switches are shown in the image below.

\* If you have already set up your fixture and it's not practical to change the DMX address, this can be changed by tapping the Start Address number. Note that the end address is fixed because the number of channels a fixture uses is fixed.

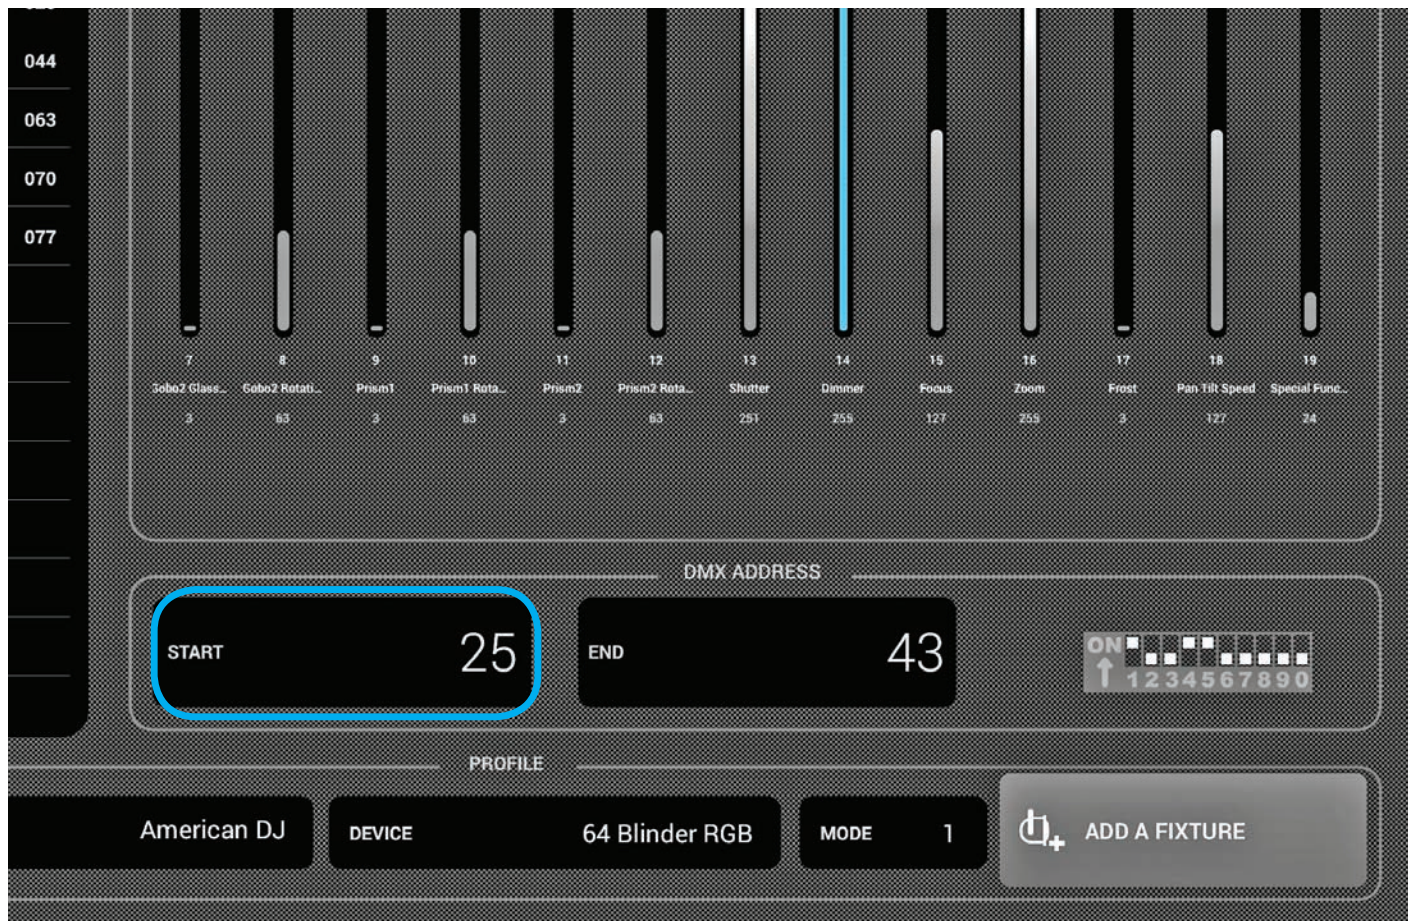

## Changing the Order of the Fixtures

All effects are applied in the order the fixtures appear in the list. For example, if you have the myDMX GO Classic color effect chasing between fixtures, it will start at fixture 1 and end at the last fixture in the list. To change the order of fixtures, tap and hold a fixture and drag it to a different position in the list (this will not affect the DMX address of the fixture).

# APP INSTRUCTIONS

## Controlling with the Faders

myDMX GO Classic has been designed to control fixtures automatically, however you can manually override the value of a fixture's channel.

1. Select a fixture by tapping it in the list.
2. Scroll left or right to find the fader you would like to control. Tap the desired fader to select. Once selected, the fader will turn blue.
3. Drag the fader up and down to change the value
  - To reset the fader back to automatic mode, tap the reset icon at the top of the fader.



# APP INSTRUCTIONS


## Setting Pan/Tilt Limitations

The limitations grid allows you to limit and invert the pan and tilt values of a fixture or group of fixtures. There are several reasons why this is important:

- Moving-Head lights can typically pan 360-600 degrees. For myDMX GO Classic's effects to look good, it's best that they only pan no more than 180 degrees.
- Depending on how a light is set up (or rigged), the center point is not always in the center of the stage/dance floor.
- The pan or tilt is sometimes inverted, meaning that the beam won't move in the correct direction compared with the other lights in the project.

Setting the limitations for your fixtures is a simple task that will assist in cleaning up and organizing your light shows. To set up the limitations:

1. Tap the fixture group button to the top right of the fixtures list.
2. Tap the limitations button.
3. Tap bottom center of the square and move until your lights are pointing at the floor.
4. Tap the top center of the square and move until your lights are pointing at the ceiling.
5. Tap the left center of the square and move until your lights are pointing to the left.
6. Tap the right center of the square and move until your lights are pointing to the right.
7. Tap the middle of the square and move left/right until your lights are centered.
  - For a Moving Head, the limitations square normally looks like in the image below.
  - For Scanners, limitations are not normally required due to the physical limitations of the mirror. Repeat the above steps for each of your light groups, and then repeat with single fixture selections if some fixtures are off-center.

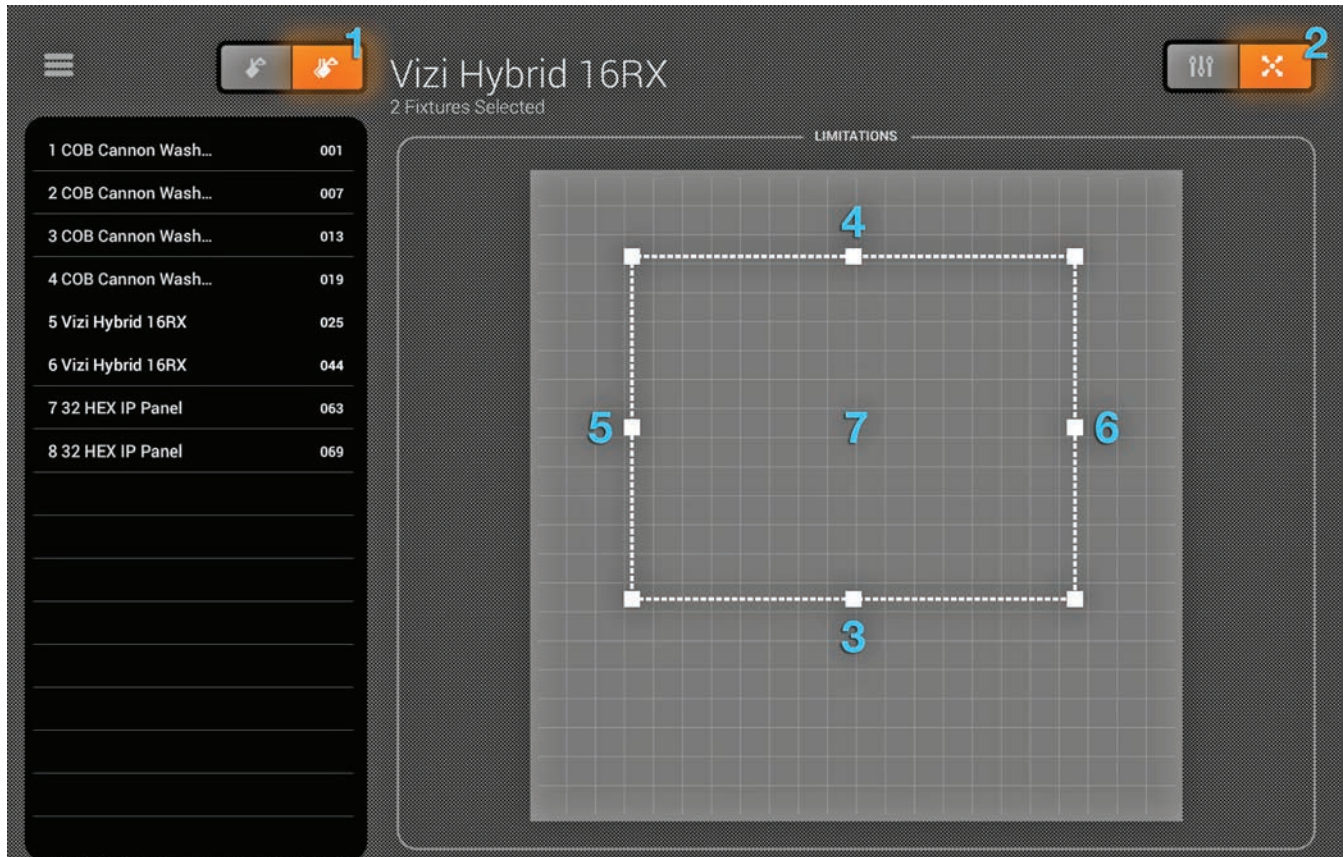

# APP INSTRUCTIONS

## Live Screen:

The live screen is your controller. It's where all lighting effects are triggered.

- Moves on the left, Colors on the right and flash effects in the middle.
- Change the Fan/Speed/Size/Shift/Fade of the selected effect by tapping in the center of the effect wheel.
- Select colors by tapping the color wheel in the bottom right.
- Touch and hold one of the 50 preset buttons to store a desired preset.
- Sync with the music by tapping the square button next to MOVES and COLORS.
- Tapping it once will sync with the BPM.
- A second tap will sync with the pulse using the tablet's microphone.
- Touch the myDMX GO logo to show and hide on-screen tips (see page 19).



# APP INSTRUCTIONS

**my GO**  
Show and hide tips

**MOVES**

- Strobe**: Activate the strobe. Move the slider up and down for more subtle effects
- Auto/Off/Low/Med/Hot**: Set the mood automatically. Effects will change every couple of minutes
- DMX fixtures, interfaces, projects and control settings**: Use the menu to access DMX fixtures, interfaces, projects and control settings

**BPM** 120 **TAP**

**DIMMER**

- Subs**: Adjust the overall brightness. Tap the subs button to control the brightness of a selection of lights
- Toggle between Time/BPM/Pulse**

**BEAM**

- 0% Roll**: Touch the dial to select a gobo / prism and drag the dial to animate
- Zoom**
- Gobo**
- Prism**

**8 stunning move effects**

- 8 dazzling color effects**: Choose up to 6 colors to use in your effects. Touch and drag a point outside the wheel to remove it. For lights with fixed color wheels, tap a color on the outside of the wheel

**Change the centre point of your movement effects**

**Change the pattern in which static colors are spread across your lights**

**Preset 1** **Preset 2** **Preset 9** **Preset 10**

**Touch and hold a preset button to store your favourite selection of effects**

# APP INSTRUCTIONS

## Colors

The color effects are situated to the right of the console. 8 effects are available and will be applied to all RGB/RGBW or CMY color mixing lights. Lights with fixed colors may also be used with the color effects, but they will not mix in the same way as color mixing fixtures.

## Choosing an Effect

Tap one of the 8 segments to play an effect across your lights. Once an effect has been chosen, the Fade, Speed, Shift and Size of the effect can be adjusted by tapping any of the 4 buttons in the center. The available options depend on the selected effect. Note: make sure that the fixtures are in the correct order because effect results may vary based on fixture order.

## Setting a color

To set which colors will be used in the effects; tap the color wheel at the bottom right. The color wheel is used to set the colors for the effects, and the segments around the color wheel are used to override the effect and recall static colors on all fixtures with fixed color wheels. Tap in an empty space in the color wheel to add a color. Drag a color point outside the color wheel to remove it. Up to 6 colors can be selected in the color wheel + 6 static colors with the segments. These are displayed below the color wheel.

Static colors are always fixed and are spread across lights with fixed color wheels. Change the pattern by tapping the button to the left of the color wheel button. This pattern button is also used with color mixing fixtures in the STOP effect.



# APP INSTRUCTIONS

## Moves

Move effects are available to the left of the console and can be applied to any fixture that has Pan and Tilt channels. Before applying move effects, it is recommended to set the limitations first.

## Choosing an Effect


As with the color effects, the move effects are triggered by tapping the 8 segment buttons. Each move effect can be adjusted using the 4 options in the center - Fan, Speed, Size and Shift.

## Setting the Center Position

The center position of an effect should be set before using the limitations, however the effect can be moved around to fine tune effects. To do this, follow the directions below:

1. Tap the center button to the bottom left of the moves area.
2. Drag the point around the grid to adjust the center point of the effect. Tapping the reset button on the right puts the center point back in the center of the grid.

The button on the left enables the gyro, which allows you to control the center point by physically moving the iPad (not available on Android).

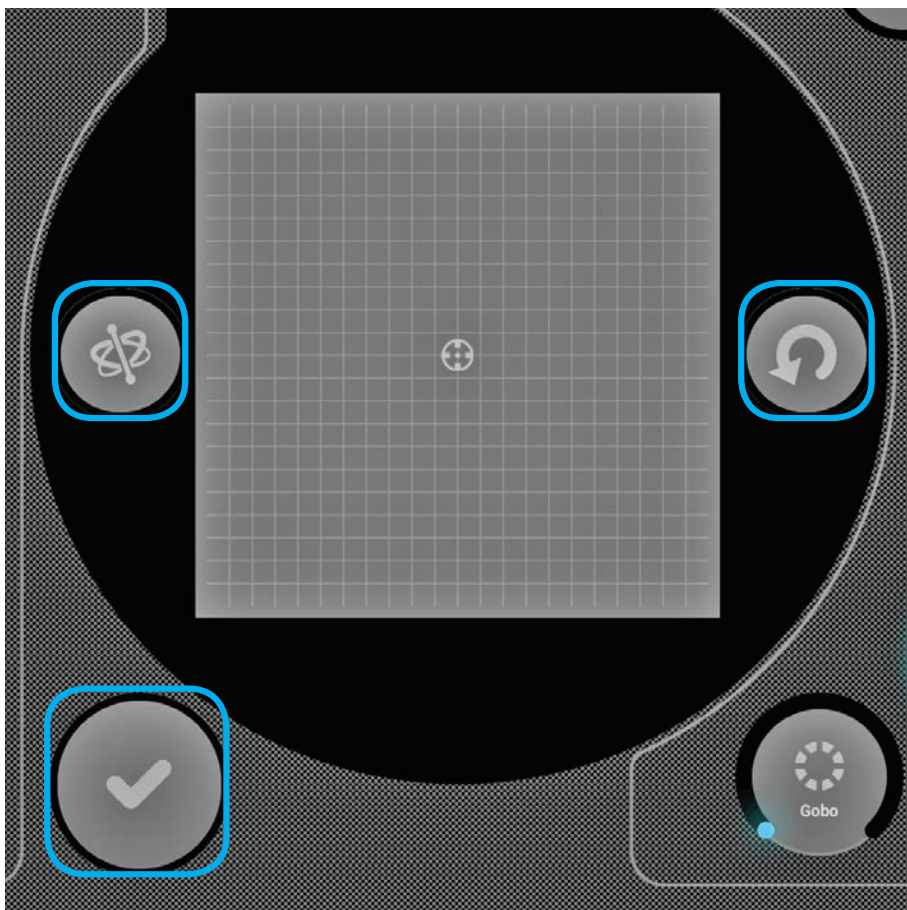

# APP INSTRUCTIONS

## Flash FX


The 5 flash effects are in the center of the console and are only active when pressed. This allows you to create quick bursts of effects. If you want to latch the effects on, this can be done by touching a flash effect, dragging outside the button and releasing. The following effects are available from left to right:

1. Smoke - activates a smoke machine.
2. Blackout - switches off all lights.
3. WOW! - creates a build-up of strobe effects synchronized with the BPM.
4. Blinder - directs a powerful bright light to the front.
5. Freeze - pauses the show, freezing the current levels being output.



## Special FX

The special effects allow control of Iris, Zoom, Gobo and Prism (if your fixtures support this functionality). Tap the dial to enable the effect or select a gobo, then drag around the dial to control the selected effect (e.g. gobo rotation speed, Iris level etc). By default these dials are rotary, but if you would prefer to control these in a linear fashion by moving up and down, this can be set in the myDMX GO settings which is accessible from the iPad settings on iPad, or the menu on Android.

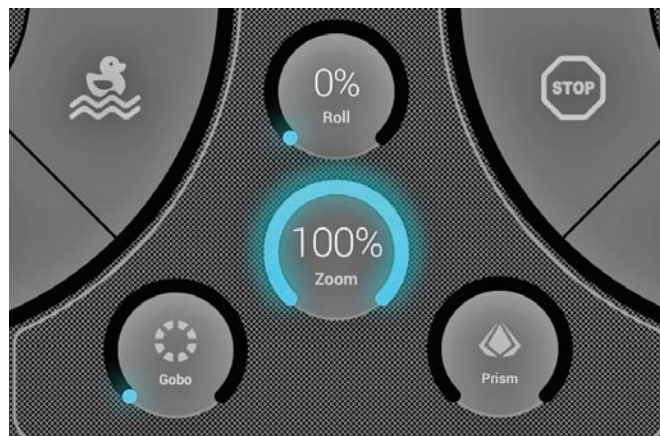

# APP INSTRUCTIONS

## Strobe

Tapping the strobe button will flash the lights at different speeds depending on the value of the slider.

## Dimmer

The slider on the right controls the brightness of all lights. You can control the brightness of each fixture type, and flash the lights by tapping the Subs button.

## Presets


The presets allow you to store a snapshot of your current show. There are 50 presets in total with 10 visible at a time. To jump to the previous/next bank of presets, swipe left/right along the bottom of the screen. To store a preset, touch and hold it for 1 second, like with a car stereo! Choose a name for your preset and tap "Save Preset". Any manual channel values set on the fixtures screen will also be saved.



# APP INSTRUCTIONS

## Pulse

Music pulse sync uses the microphone of the tablet to listen to the music. When the volume level jumps over a threshold, the effect will jump to the next section. The threshold is calculated automatically depending on the volume level.



## Sync

Sync effects are designed to sync music, either with a BPM (beats per minute) to create a consistent beat-matched effect, or via the music pulse where the effects pause when the music stops.

1. Tap the square button next to Moves or Colors to sync the respective effects with the BPM, a metronome icon will appear.
2. Tap a second time to sync with the pulse, a microphone icon will appear.
3. Tap again to stop the sync, a clock icon will appear.




When in BPM sync mode, the speed control of the effects will change from a slider to a selector allowing you to choose the beat division. For example, if you have the disco effect selected, the 1x will change the color on each beat, the 2x will change the color every 2 beats, and the 1/2x will change the color twice for each beat.



# APP INSTRUCTIONS

## BPM - Tap


Be sure the Color or Move effects are in BPM mode with the metronome icon visible. Once visible, tap the BPM with the TAP button at least 3 times.

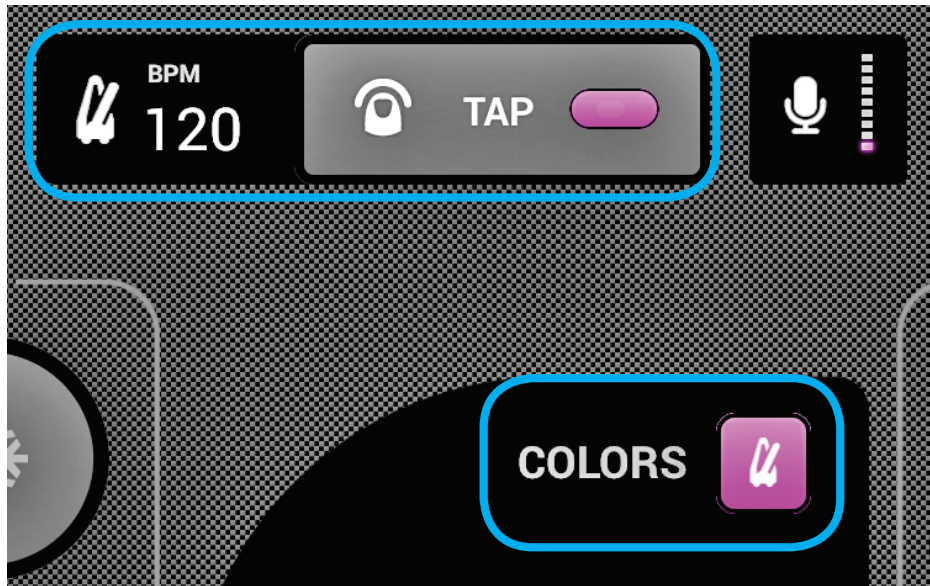

## BPM - Ableton Link (iPad only)

myDMX GO Classic can sync with over 100 different apps and software using Ableton Link. This is the most accurate way to sync your lights with the music. To set up Ableton Link:

1. Ensure that the Ableton Link device and myDMX GO Classic are on the same network.
2. Open your Ableton Link compatible software and enable LINK (refer to the software/app user manual).
3. Open the myDMX GO menu and tap “Ableton Link” (at the bottom).
4. Tap “Ableton Link”.

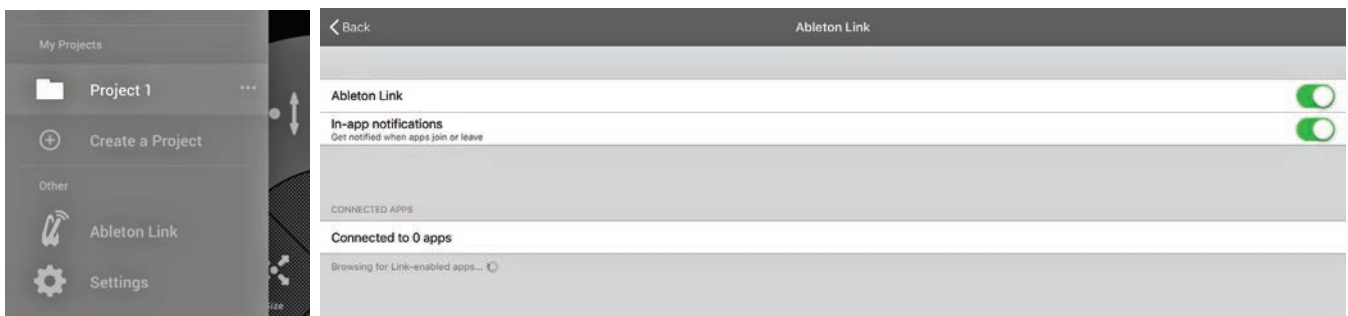

When Ableton Link is enabled, you will see “LINK” written in the top right. Note: the displayed BPM is rounded to the closest number, the BPM that is analyzed and used for processing is much more accurate.



# APP INSTRUCTIONS

## MIDI (iPad Only)

The effect buttons, preset buttons, flash buttons and sub master dimmers can be controlled by MIDI. This is a bonus feature and custom mappings are not currently possible. If you have a controller such as an Elation or Behringer controller, you can normally modify the commands the controller sends (refer to the respective user manuals for further info). To control myDMX GO Classic via MIDI, you'll need a Lightning to USB adapter.

The MIDI mappings are as follows:

Color Effects 1-8: Note 40-47

Move Effects 1-8: Note 48-55

Presets 1-8: Note 39-32

Presets 9-16: Note 31-24

Presets 17-24: Note 23-16

Presets 25-32: Note 15-8

Presets 33-40: Note 7-0

Sub master dimmers 1-8: CC 48-55

Sub flash buttons 1-8: Note 64-71

Master dimmer: CC 56

Strobe button: Note 56

Flash buttons 1-5: Note 58-62

TAP button: Note 63

# APP INSTRUCTIONS

## Other Settings

The settings screen can be accessed from the myDMX GO menu.

1. Light Cloud details - The name and e-mail address of the Light Cloud account is displayed here. Light Cloud allows you to synchronize data with other apps and devices. In future this will include fixture profiles, projects and in-app purchases.
2. Automood Mode - Determines if an effect is synchronized to the BPM or pulse when Automood is activated.
3. Rotary Dials - Dials will be controlled by moving in a circle instead of up and down.
4. Custom Dial (iPad only) - Allows for the dial in the middle to control the size of an iris or the speed of a roller barrel.
5. Lock Fixtures Screen - Locks the possibility to add/remove/change the order of fixtures. This can be useful if myDMX GO Classic is being used in a bar or installation.



# TROUBLE SHOOTING TIPS

## Unable to find myDMX GO app in the app store:

The myDMX GO app is only available for iOS (10.0 and up) and Android (version 4.0.3 and up) powered tablets. Please check your device compatibility when downloading.

## Unable to download a profile for a lighting fixture:

If the fixture appears in the list but has a red dot to the right of the fixture, the profile needs to be downloaded. In order to download the profile, ensure that the tablet has an internet connection.

## Unable to find a fixture profile for a lighting fixture:

If you do not see a profile for your fixture, visit <https://store.lightriderapp.com/en/ssl> to create a New Fixture Request

## Connection between the WiFi device and tablet are lost:

Refresh the connection by disconnecting the power to the WiFi device and reconnecting it after a 5 seconds. If problem persists, delete the device's WiFi profile and re-connect using your tablet.

## FREQUENTLY ASKED QUESTIONS

Listed below are a few answers to common questions users may have.

### 1. What is the WiFi password?

The password is **smartdmx0000**.

### 2. How many fixture profiles are there?

The fixture library has over 15,000 lighting fixture profiles. If you do not see a profile for your fixture, visit <https://store.lightriderapp.com/en/ssl> to create a New Fixture Request.

### 3. Can you control the myDMX GO Classic WiFi device via USB?

The USB-C port on the WiFi device can be used to power the WiFi unit connect the device to an Android tablet for control (Android only).

For additional accessories, please visit [www.adj.com](http://www.adj.com)

# SPECIFICATIONS

- DMX Lighting Control App for iPad or Android Tablets
- 256 DMX channels (Up to 256 additional channels can be purchased at [store.dmxsoft.com](http://store.dmxsoft.com) for use with mydmx GO Classic. 512 additional channels can be purchased if a second universe is required when using the interface with myDMX 3.0 software only)
- DMX over WIFI & USB
- Library of 15,000+ lighting fixtures
- Manual Channel Control
- Light Position Calibration
- 21 Automatic Effects
- 50 User Presets
- Speed / Size / Shift / Fade / Fan control
- Master & Submasters
- Color Wheel
- Plug & Play
- Upgrades available at [store.dmxsoft.com](http://store.dmxsoft.com)

iPad Compatibility: Requires iOS 13.0 or later. Compatible with iPad Air, iPad Air Wi-Fi + Cellular, iPad mini 2, iPad mini 2 Wi-Fi + Cellular, iPad Air 2, iPad Air 2 Wi-Fi + Cellular, iPad mini 3, iPad mini 3 Wi-Fi + Cellular, iPad mini 4, iPad mini 4 Wi-Fi + Cellular, 12.9-inch iPad Pro, 12.9-inch iPad Pro Wi-Fi + Cellular, 9.7-inch iPad Pro, 9.7-inch iPad Pro Wi-Fi + Cellular, iPad (5th generation), iPad Wi-Fi + Cellular (5th generation), 12.9-inch iPad Pro (2nd generation), 12.9-inch iPad Pro Wi-Fi + Cellular (2nd generation), 10.5-inch iPad Pro, 10.5-inch iPad Pro Wi-Fi + Cellular, iPad (6th generation), iPad Wi-Fi + Cellular (6th generation), iPad Pro (11-inch), iPad Pro (11-inch), iPad Pro (12.9-inch) (3rd generation), and iPad Pro (12.9-inch) (3rd generation).

Android Tablets or Amazon Fire Tablets 4.0.3 and up

# OPTIONAL ACCESSORIES

Order Code	Description
PWR571	POW-R BAR65 power block with protected AC power and USB in one
C-CLAMP	C-Clamp for light-medium duty hanging applications
PRO-CLAMP	360 degree aluminum clamp with a max rating of 1,100 lbs

Additional accessories available at [www.adj.com](http://www.adj.com)

# DIMENSIONAL DRAWINGS



