

Encore FR Pro Color



Light Efficiency:

23 Lumen/Watt

Light Quality:

CRI: 98.3

Color Temperature:

5052 K

Output: 8719 lm

Peak: 27559 cd


Power: 387 W

PF: 1.0



Beam Angle

35.3°

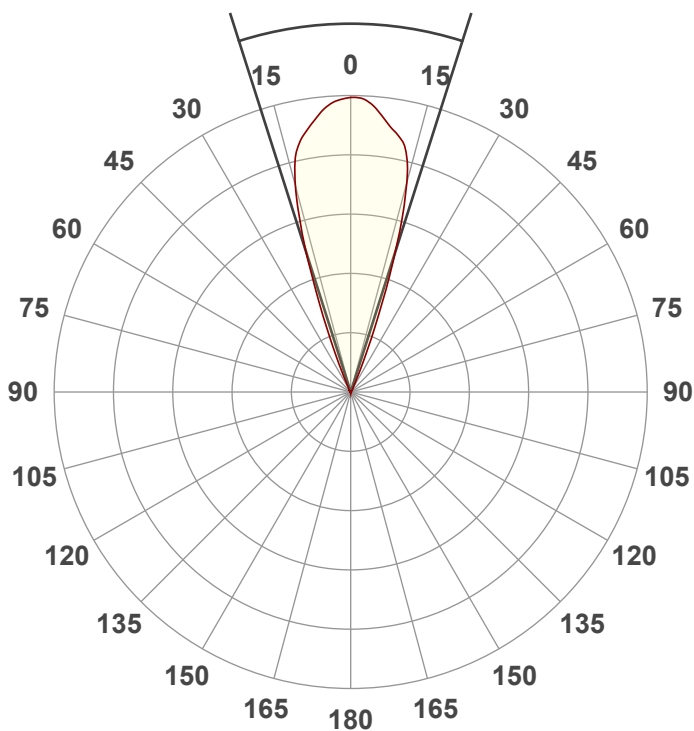

Test:

Zoom Out CRI

Date:

11/15/2021

Note:

R @ 232


G @ 255

B @ 148

A @ 255

C @ 255


L @ 255



CIE 1931
x: 0.345
y: 0.365

Spectra



Dominant Wavelength: 575nm

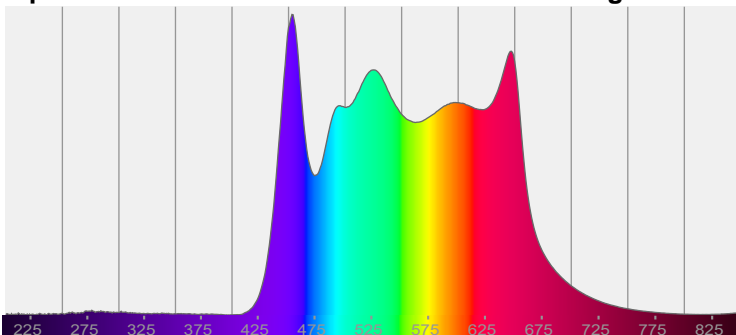


Power

Voltage: 116 V
Current: 3.33 A
Frequency: 0 Hz


Color Details

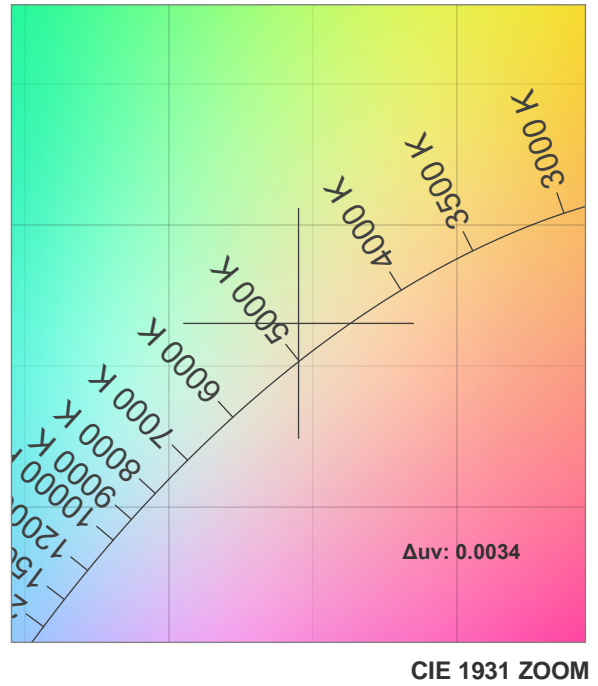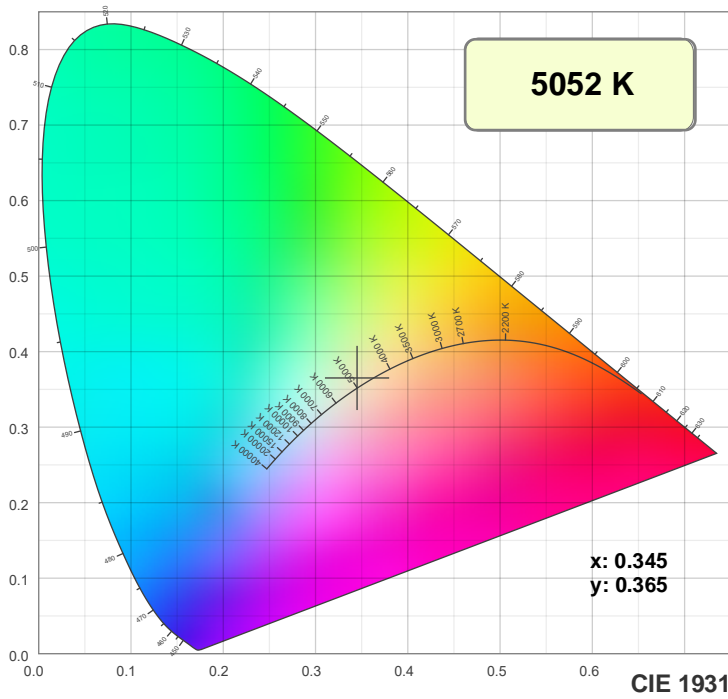

TM30: 94.2

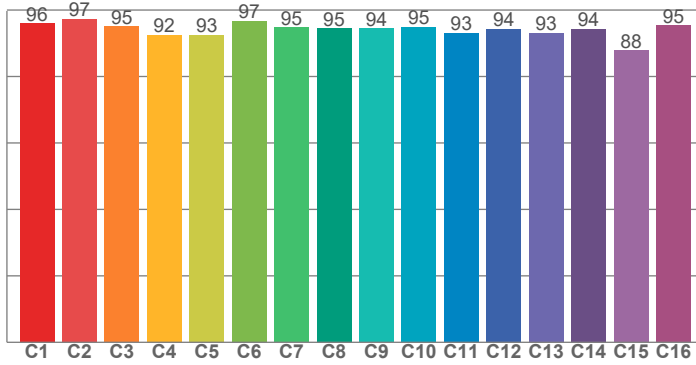

CRI: 98.3 (R1-R8)

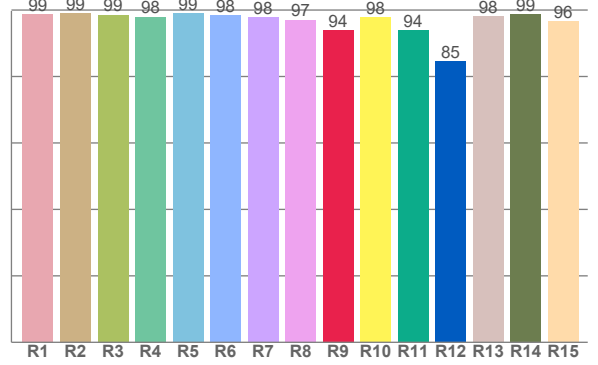

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.8	99.1	98.6	97.9	99.0	98.3	97.8	97.1	93.9	97.7	93.8	84.6	98.1	98.6	96.5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
96.0	97.4	95.1	92.5	92.6	96.7	94.7	94.5	94.4	95.0	93.1	94.3	93.2	94.4	87.9	95.4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.7	97.4	97.7	98.7	98.8	99.0	98.8	98.8	95.9	94.9	94.3	95.1	97.0	98.9	96.9


CQS: 96.5

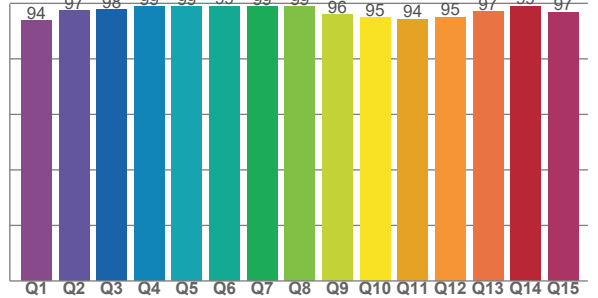

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5052 K	98.3	93.9	94.2	99.7	96.5	0.345	0.365	0.206	0.327	0.0034

Beam Details

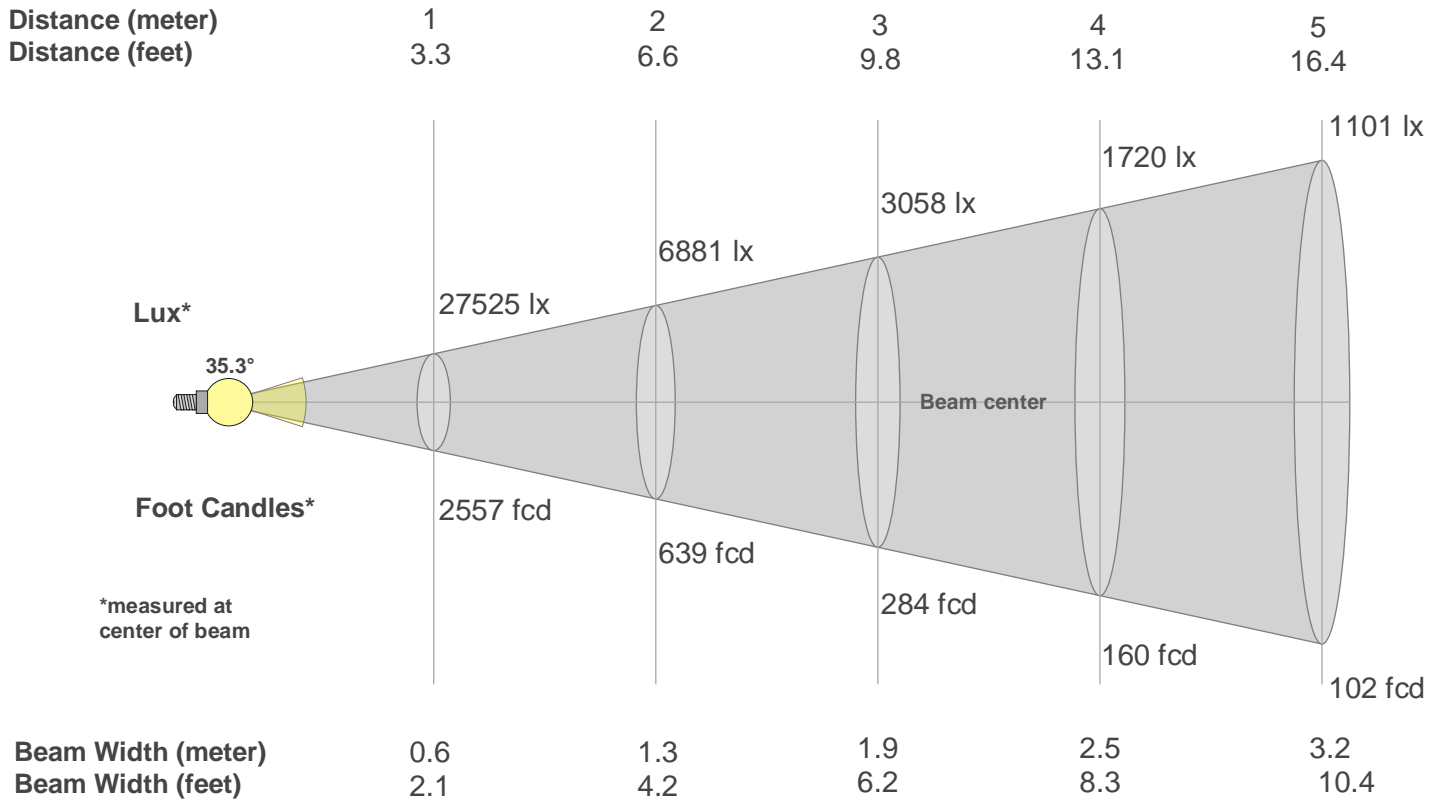

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	27525	6881	3058	1720	1101	765	562	430	340	275	227	191	163	140	122	108	95	85	76	69
fcd	2557.2	639.3	284.1	159.8	102.3	71	52.2	40	31.6	25.6	21.1	17.8	15.1	13	11.4	10	8.8	7.9	7.1	6.4

Intensities in 0° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
27.5K	27.4K	27.0K	26.3K	25.5K	24.6K	23.5K	21.5K	17.8K	12.8K	7.6K	3.8K	1.7K	0.8K	0.5K	0.4K	0.4K	0.3K	0.3K	0.2K
100%	99%	98%	96%	93%	89%	85%	78%	65%	47%	28%	14%	6%	3%	2%	1%	1%	1%	1%	1%

Intensities in 90° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
27.5K	27.4K	27.0K	26.3K	25.5K	24.6K	23.5K	21.5K	17.8K	12.8K	7.6K	3.8K	1.7K	0.8K	0.5K	0.4K	0.4K	0.3K	0.3K	0.2K
100%	99%	98%	96%	93%	89%	85%	78%	65%	47%	28%	14%	6%	3%	2%	1%	1%	1%	1%	1%

Intensities in 180° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
27.5K	27.5K	27.0K	26.2K	25.3K	24.6K	23.7K	21.7K	18.0K	12.8K	7.7K	3.9K	1.8K	0.9K	0.6K	0.5K	0.4K	0.3K	0.3K	0.2K
100%	100%	98%	95%	92%	89%	86%	79%	65%	47%	28%	14%	7%	3%	2%	2%	1%	1%	1%	1%

Intensities in 270° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
27.5K	27.5K	27.0K	26.2K	25.3K	24.6K	23.7K	21.7K	18.0K	12.8K	7.7K	3.9K	1.8K	0.9K	0.6K	0.5K	0.4K	0.3K	0.3K	0.2K
100%	100%	98%	95%	92%	89%	86%	79%	65%	47%	28%	14%	7%	3%	2%	2%	1%	1%	1%	1%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
35.3°	45.7°	53.9°	99.6%	98.4%