

FUZE PROFILE+



ELATION®

500W Full Spectrum RGBMA LED Framing Profile Fixture

PRELIMINARY DATA SHEET



KEY FEATURES

Extended color RGBMA LED Engine, 92 CRI

Rotating and Fixed Gobos plus Animation Wheel

Full Blackout Framing System

Iris, 2x Prism, and 2x Variable Frost

Wide Zoom Range from 4° to 54°

Interchangeable Front Lens with Fresnel option

The **FUZE Profile+** is the next evolution of the industry-trusted FUZE Series, combining the line's most in-demand features into one compact, production-ready profile.

Delivering confident, reliable illumination, **FUZE Profile+** pairs powerful output with refined color quality. Advanced RGBMA color mixing, 92 CRI, and Virtual CCT produce natural skin tones, accurate whites, and consistent color across every look. A robust 500W LED engine delivers 12,700+ lumens of punchy output—cutting through demanding environments while preserving the nuanced color rendering required for theatrical, broadcast, and live-event applications.

Designed for precision and creative control, **FUZE Profile+** offers clean framing, a wide 4°–54° zoom range, and a true full-blackout framing system with no light spill. Rotating and fixed gobos, an animation wheel, and integrated tools including an iris, two prisms, and dual variable frosts add depth, motion, and texture—supporting everything from tight highlights to soft, immersive washes.

Compact and versatile, **FUZE Profile+** transitions easily between touring, rental, and installed environments. A sub-30kg build, an interchangeable front Fresnel lens, multiple fan modes, and the familiar FUZE platform ensure fast setup, quiet operation, and consistent workflows—so designers can focus on bold, confident lighting.

ELATION®

Specifications are subject to change without notice ©Elation Professional 01/28/2026
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

FUZE PROFILE+



500W Full Spectrum RGBMA LED Framing Profile Fixture

SPECIFICATIONS

SOURCE

500W 6,000K RGBMA LED Engine
30,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

12,740 Total Lumen Output
CRI 92
Zoom Range 4° - 54°

EFFECTS

Motorized Zoom
4 Rotating Full Blackout Framing Blades, +/- 60 Index
2 Variable Frost Filters (Light & Heavy)
4-Facet Linear & Round Rotating Prisms
Motorized Iris with Effects
Variable 16-bit Dimming Curve Modes
High Speed Electronic Shutter and Strobe
Pan Angle: 540°
Tilt Angle: 270°

COLOR

RGBMA Color Array
CMY Emulation
16bit Fully Variable CCT 2400K - 8500K
Green/Magenta Shift
Dim-to-warm Fade
Virtual Gel Swatch Book

GOBOS

1x 7 Rotating / Indexing Interchangeable Glass Gobos
1x 8 Fixed Glass Gobo
Bi-Directional Animation Wheel

CONTROL / CONNECTIONS

7 DMX Channel Modes (RGBMA 40 / 59) (RGB 38 / 55)(CMY 38 / 55) Fuze Profile Emulation Mode (38)
16-bit Pan, Tilt, and Dimming Control
DMX Adjustable LED Frequency
DMX, RDM, Art-Net & sACN Protocol Support
Aria x2 Wireless Device Management
4 Button Touch Control Panel
Full Color 180° Reversible LCD Menu Display
16 Bit Resolution Adjustable Movement
NFC on bottom and front of fixture base
Hibernation Mode (Power Save)
5pin DMX In/Out
Locking RJ45 Ethernet In/Out
Locking Power Cable In/Out

SIZE / WEIGHT (without accessories)

Length: 16" (408mm)
Width: 10.1" (256mm)
Vertical Height: 27.8" (705mm)
Weight: 63.9 lbs (29kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
781W Max Power Consumption
14°F to 113°F (-10°C to 45°C)
BTU/hr (+/- 10%) 2663.21

APPROVALS / RATINGS

IP20



ORDERING INFORMATION

SKU (US)	SKU (EU)	ITEM
FUZ321	Pending	Elation Fuze Profile+




FUZE PROFILE+



500W Full Spectrum RGBMA LED Framing Profile Fixture

DIMENSIONAL DRAWINGS

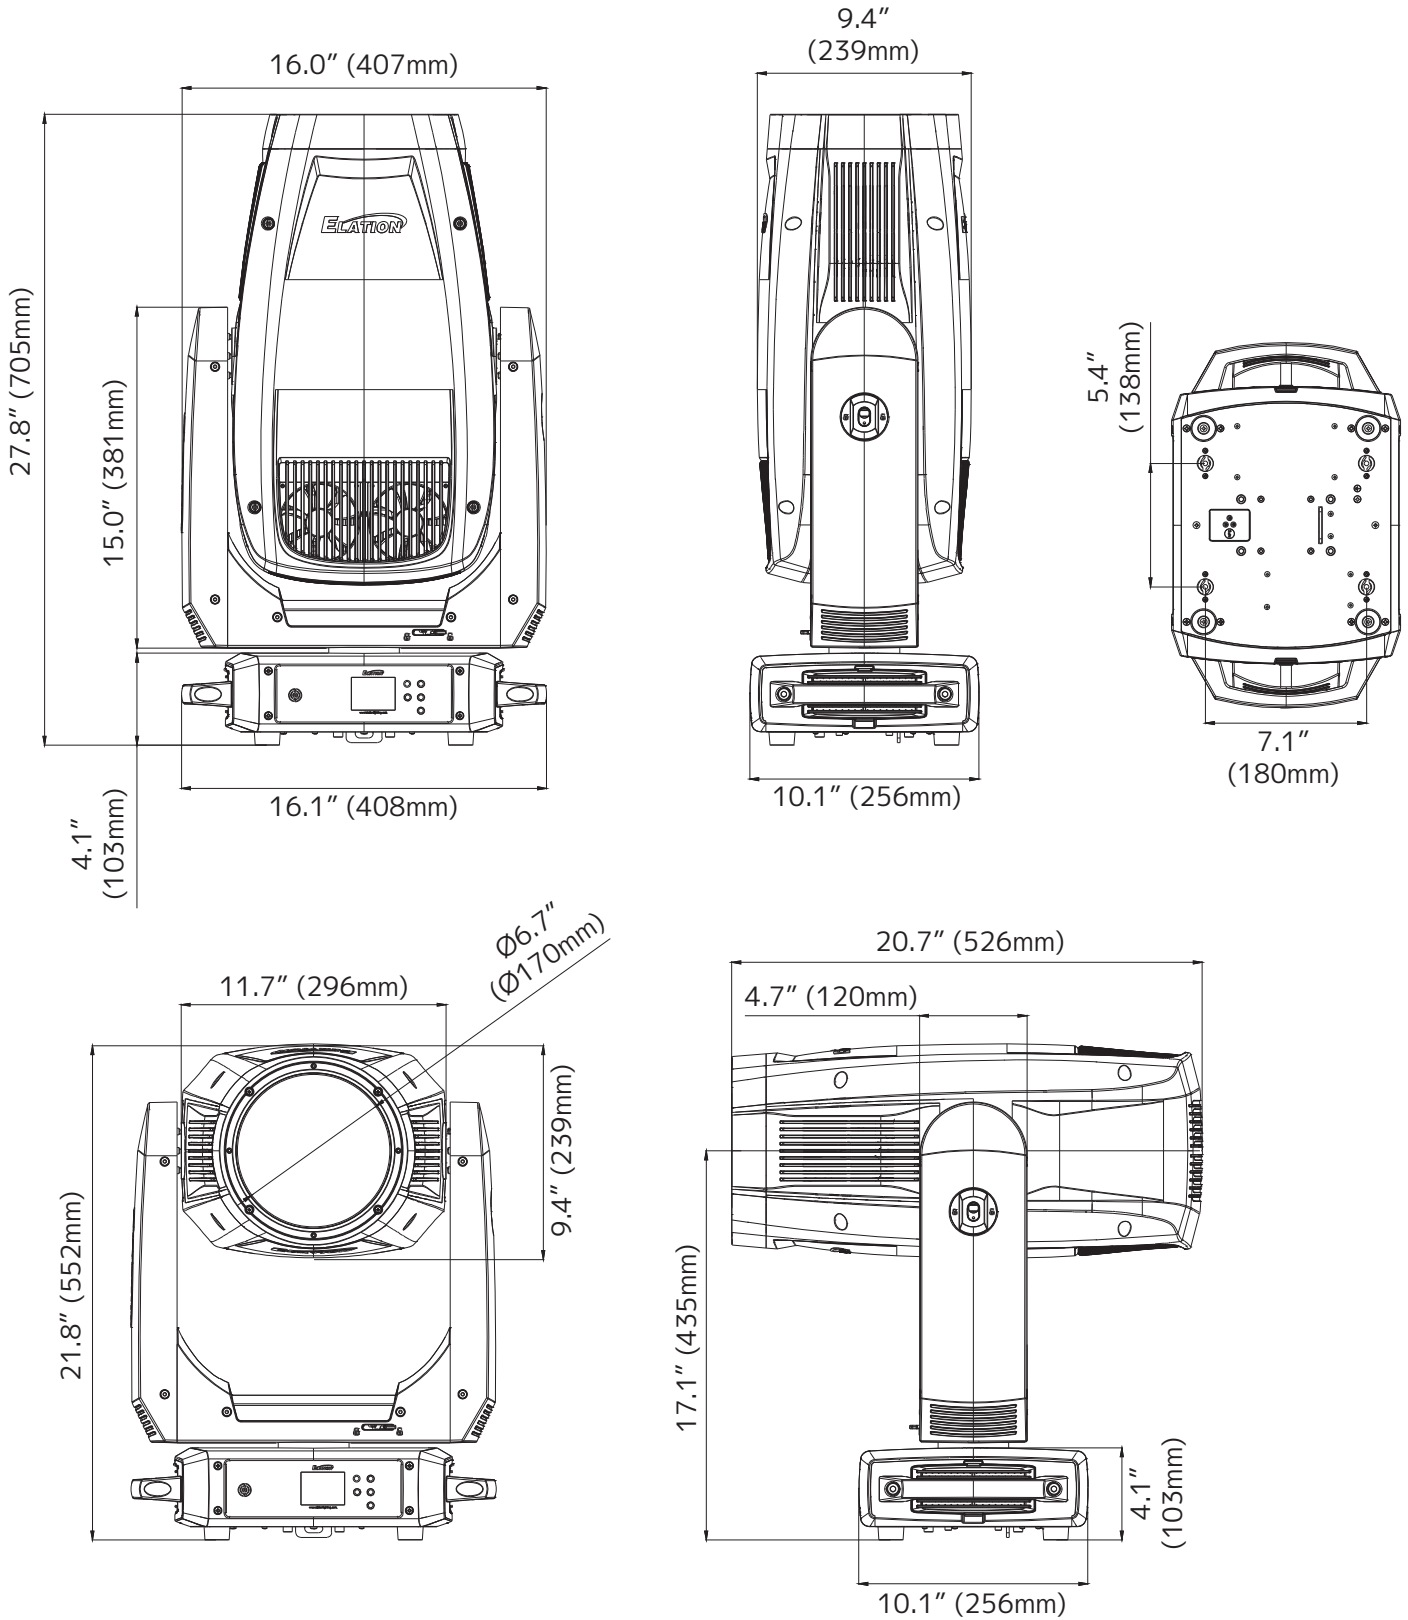

Specifications are subject to change without notice ©Elation Professional 01/28/2026
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu