

FUZE SFX



ELATION®

300W LED Spot/FX Fixture with CMY

DATA SHEET



KEY FEATURES

300W LED 6,600K White LED Engine

12,135 Total Lumen Fixture Output

Spot and Effects Fixture

Zoom Range from 4.5° to 38°

Variable CMY and 7-Position Color Wheel

8 Rotating and 10 Fixed Gobos

Dual Independent Prisms for Layering

Motorized Iris

Variable Wash Frost Filter

The **FUZE SFX™** is a new concept LED Spot FX fixture designed for a variety of applications requiring a compact and powerful multi-purpose luminaire. The SFX is capable of projecting tight beams to wide washes using a highly efficient optical design while providing over 12,000 lumens of output from its 300W white LED engine.

Housing 18 carefully designed gobos and a 4.5° to 38° zoom, the **FUZE SFX** can create stunning mid-air FX as easily as precise image projections. The SFX allows for even stage washes utilizing its variable frost filter while a wide array of beautiful colors is possible from a seamless CMY color-mixing system plus color wheel. Dual independent rotating and overlaying prisms plus a fast iris round out the comprehensive feature set.

A truly remarkable compact powerhouse for any application, the **FUZE SFX** is sure to create amazing effects, outstanding projections and beautiful bright washes on any stage.



Specifications are subject to change without notice ©Elation Professional 06/10/2026
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

FUZE SFX



300W LED Spot/FX Fixture with CMY

SPECIFICATIONS

SOURCE

300W 6,600K Bright White LED Engine
20,000 Hour Average LED Life*
*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

12,135 Total Lumen Output
CRI 68+
Zoom Range 4.5° - 38°
Beam Angle 4.6° - 38.2°
Field Angle 5.6° - 42.2°

EFFECTS

Motorized Zoom
Remote Focus
Variable Frost Filter
Dual Independent Prisms (6 Facet linear & 6 Facet round)
Motorized Iris
Variable 16-bit Dimming Curve Modes
High Speed Electronic Shutter and Strobe
Pan Angle: 540°/630°
Tilt Angle: 270°

COLOR

CMY Variable Color Mix
7 Position Color Wheel
High CRI Filter, CRI 84
CTO Filter, 3200K, CRI 77

GOBOS

2 Gobo Wheels
Wheel #1 with 8 Rotating / Interchangeable Glass Gobos
Wheel #2 with 10 Static Gobos

CONTROL / CONNECTIONS

31 DMX Channels
16-bit Pan, Tilt, and Dimming Control
DMX Adjustable LED Frequency
4 Button Touch Control Panel
Full Color 180° Reversible LCD Menu Display
Locking 5pin XLR Connector In/Out
IP65 Locking Power Connector In/Out
USB Connection (Firmware Updates)
With Wired Digital Communication Network

SIZE / WEIGHT

Length: 14.3" (362mm)
Width: 9.2" (233mm)
Vertical Height: 23.4" (595mm)
Weight: 45.9 lbs. (20.8kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
432W Max Power Consumption
14°F to 113°F (-10°C to 45°C)
BTU/hr (+/- 10%) 1473.12

APPROVALS / RATINGS

CE | cETLus | IP20




FUZE SFX




300W LED Spot/FX Fixture with CMY

GOBOS

Gobo Wheel 1 (Rotating)

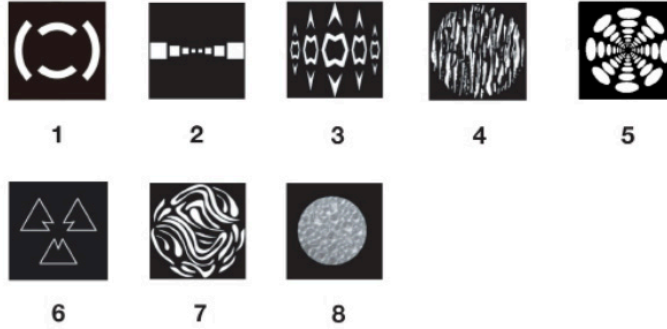

Gobo Wheel 2 (Static)

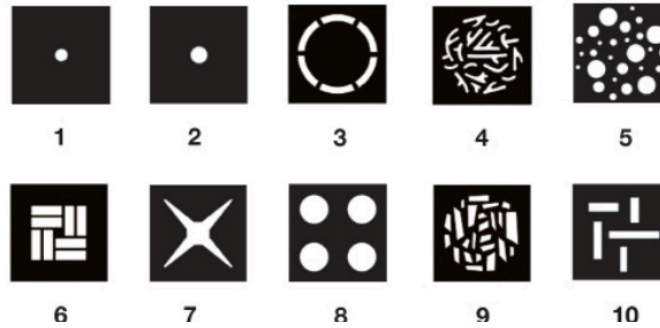

ORDERING INFORMATION

SKU NUMBER	DESCRIPTION
FUZ406	FUZE SFX (US)
1237000223	FUZE SFX (EU)
FUZ418	Fuze SFX White (US)



Specifications are subject to change without notice ©Elation Professional 06/10/2026
 Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

FUZE SFX



300W LED Spot/FX Fixture with CMY

UNIT DIMENSIONS

