

# Pixie Strip 30



Light Efficiency:

3 Lumen/Watt

Light Quality:

CRI: 0.0

Color Temperature:

32829 K

Output: 45.6 lm

Peak: 11.7 cd


Power: 15.1 W

PF: 0.82



Beam Angle


120.1°

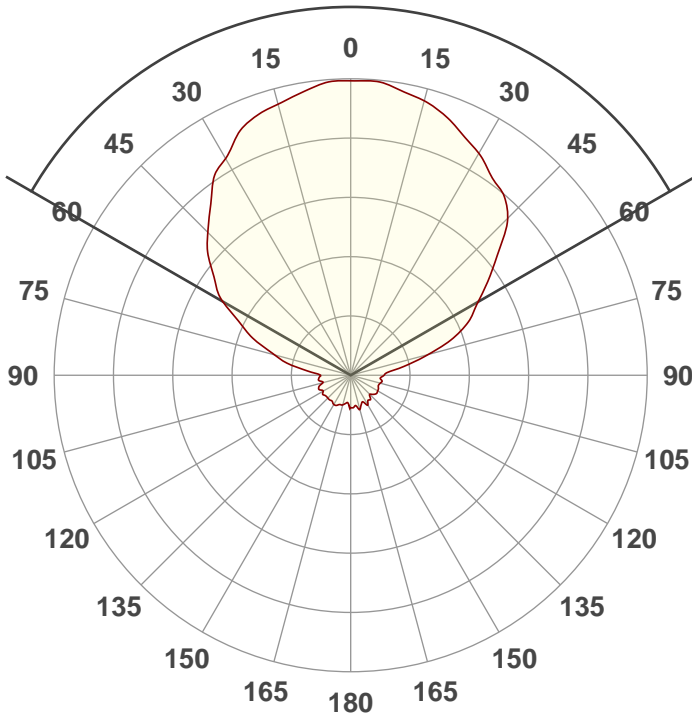

Test:  
Round Lens Full On

Date:  
2/18/2021


Note:




CIE 1931  
x: 0.241  
y: 0.254

Spectra



Dominant Wavelength: 478nm

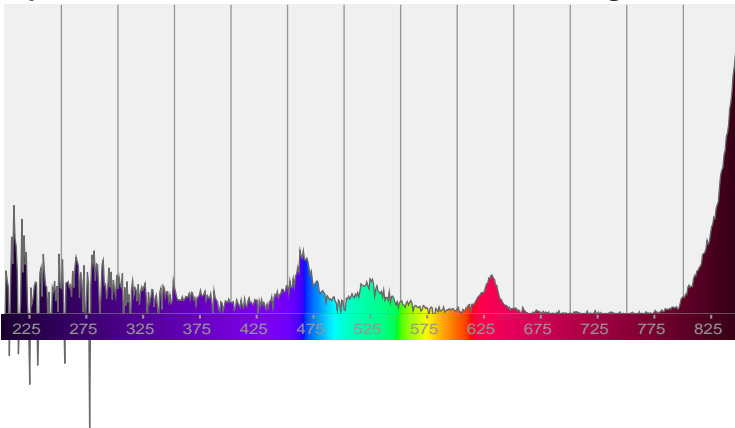


Power

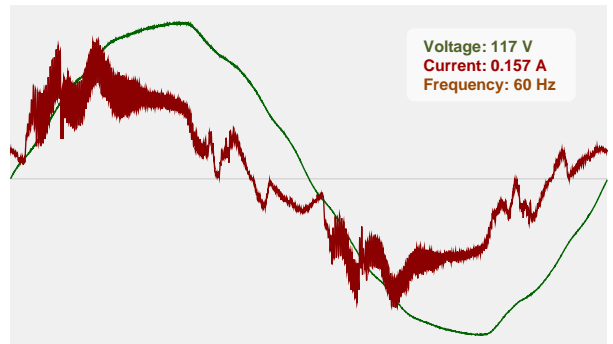

# Color Details

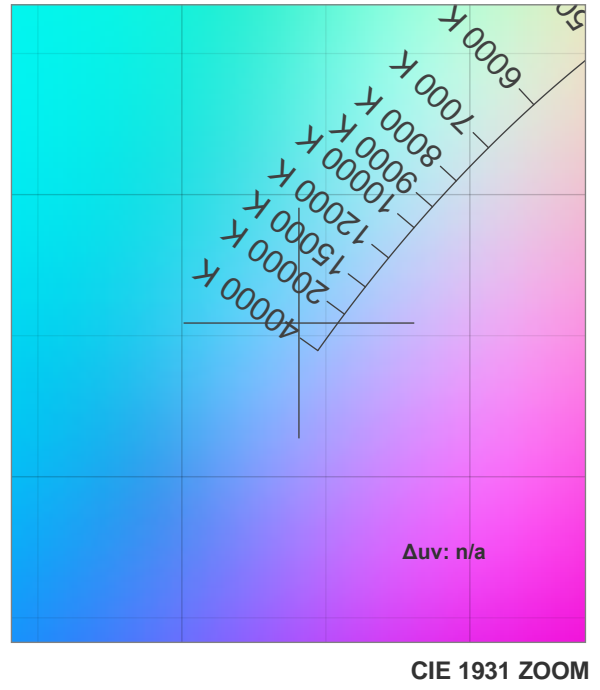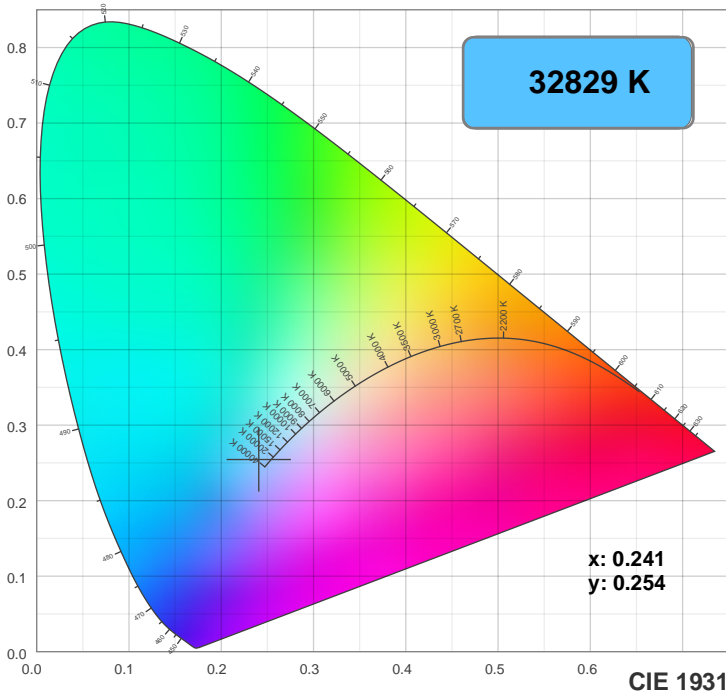

**TM30: 0.0**

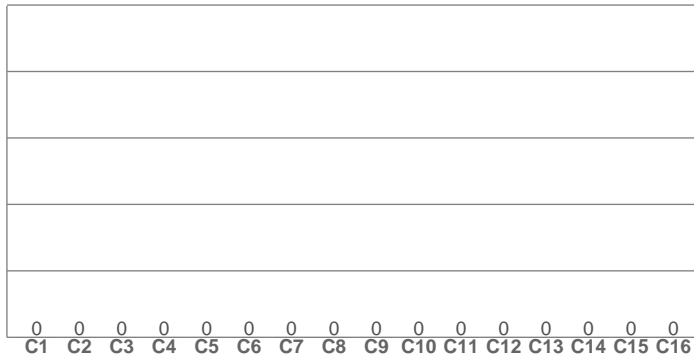

**CRI R values, only R1-R8 are used to calculate final CRI value**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


**TM30 C values, 16 binned values out of total of 99 C values**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


**CQS Q values**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CRI: 0.0 (R1-R8)**

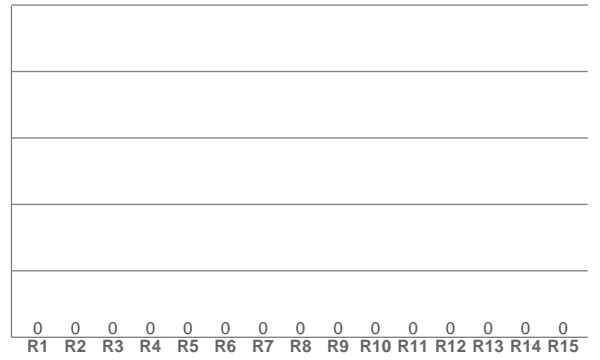


**CQS: 0.0**

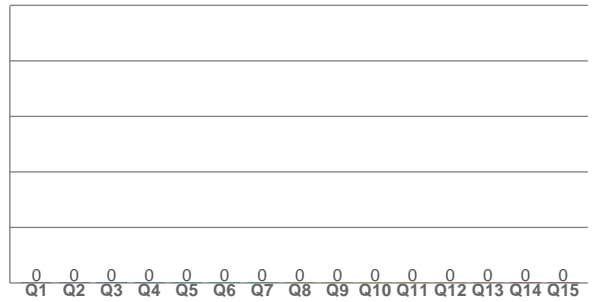

## Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
32829 K	0.0	0.0	0.0	0.0	0.0	0.241	0.254	0.173	0.274	n/a

# Beam Details

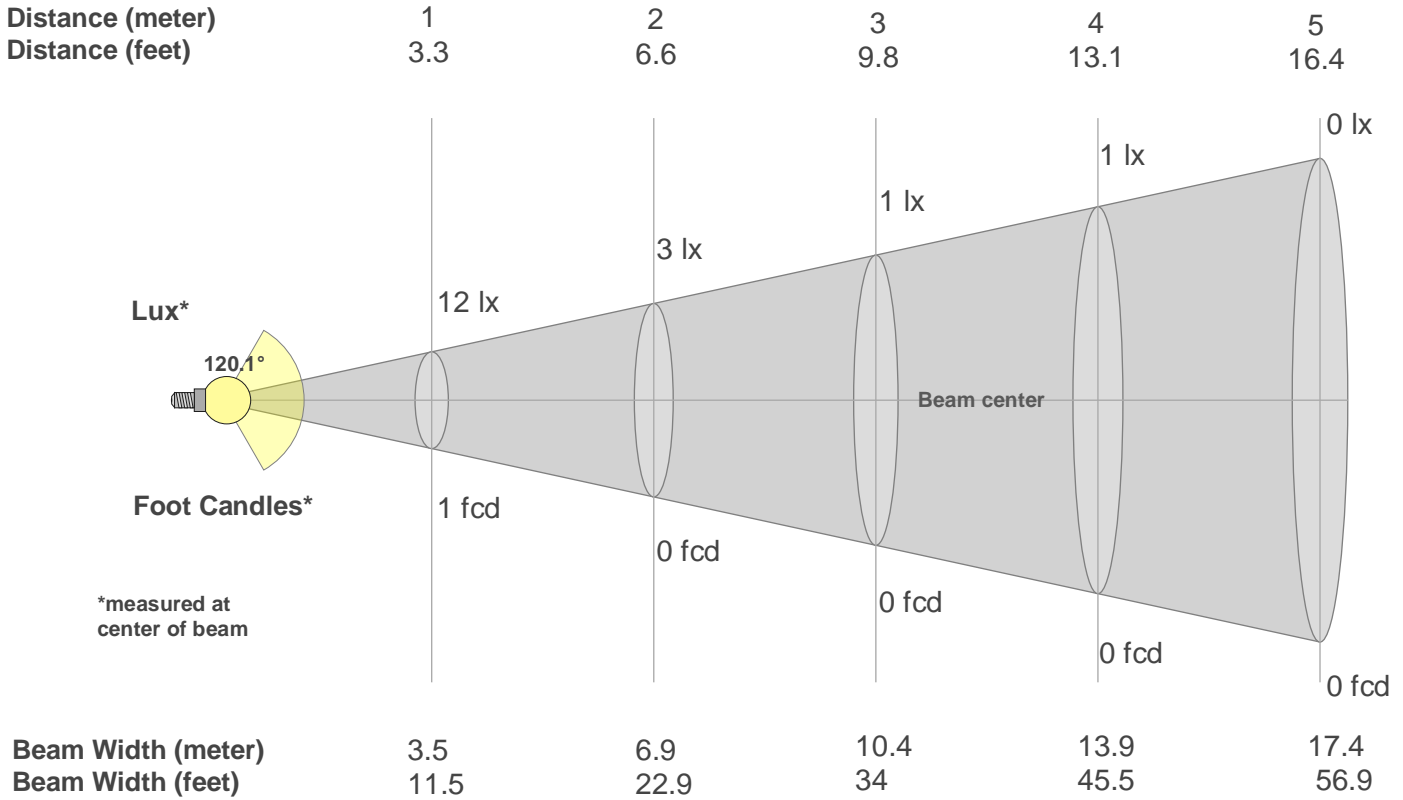

**Beam Intensities from 1-20m**

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	12	3	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
fcd	1.1	0.3	0.1	0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

**Intensities in 0° C-plane**

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
11.7	11.4	11.0	10.3	9.3	8.0	6.7	5.2	3.6	2.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.1
100%	98%	94%	88%	80%	69%	58%	45%	31%	19%	11%	11%	11%	11%	11%	11%	11%	11%	11%	10%

**Intensities in 90° C-plane**

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
11.7	11.4	11.0	10.3	9.3	8.0	6.7	5.2	3.6	2.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.1
100%	98%	94%	88%	80%	69%	58%	45%	31%	19%	11%	11%	11%	11%	11%	11%	11%	11%	11%	10%

**Intensities in 180° C-plane**

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
11.7	11.5	11.1	10.4	9.6	8.8	6.9	5.4	3.9	2.1	1.3	1.2	1.2	1.2	1.2	1.1	1.2	1.3	1.3	1.2
100%	99%	95%	89%	82%	75%	59%	47%	33%	18%	11%	11%	10%	11%	11%	9%	10%	11%	11%	10%

**Intensities in 270° C-plane**

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
11.7	11.5	11.1	10.4	9.6	8.8	6.9	5.4	3.9	2.1	1.3	1.2	1.2	1.2	1.2	1.1	1.2	1.3	1.3	1.2
100%	99%	95%	89%	82%	75%	59%	47%	33%	18%	11%	11%	10%	11%	11%	9%	10%	11%	11%	10%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
120.1°	360°	360°	60.4%	40.3%