



REBEL PROFILE



Compact 500W IP65 Framing Profile Fixture

SPEC SHEET



KEY FEATURES

- IP65 for temporary outdoor applications
- Peak field 500W 6,500K White LED Engine
- Up to 22000 Total Lumens Fixture Output
- CMY Color Mixing and Variable CTO
- 7-Position Color Wheel with dual High CRI Filters
- Comprehensive Visual FX System featuring Rotating and Fixed Gobo Wheel, Animation, Iris, Dual Prism, Dual Frost
- Indexable Full Blackout Framing System
- Wide Zoom Range from 3.5° to 51°

The **REBEL Profile™** is a powerful compact IP65-rated LED profile fixture with high intensity beams and impressive projection for many interior and exterior applications.

Projecting up to 22000 lumens output from the Peak Field 500W 6,500K LED engine, the **REBEL Profile™** is the ideal work horse luminaire providing intense output, narrow, sharp powerful beams and impressive projection and mid air FX. **REBEL Profile™** offers the designer a comprehensive graphics package with 15 glass gobos, full animation wheel, overlapping dual prisms, dual frost and a high-speed iris. Its indexable framing system allows full-blackout shutter cuts for optimum beam shape control.

With a fast zoom range from 3.5° to 51° out of a compact fixture design, the **REBEL Profile™** has the complete feature set for a wide variety of shows and events. Fully sealed from dust and water, it is a flexible fixture ready to perform in short-term outdoor applications or any indoor environment.






REBEL PROFILE




Compact 500W IP65 Framing Profile Fixture

COLORS / GOBOS / PRISMS / ANIMATION


ROTATING GOBOS

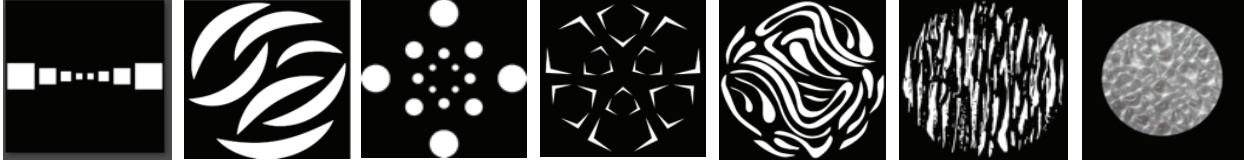

FIXED GOBOS

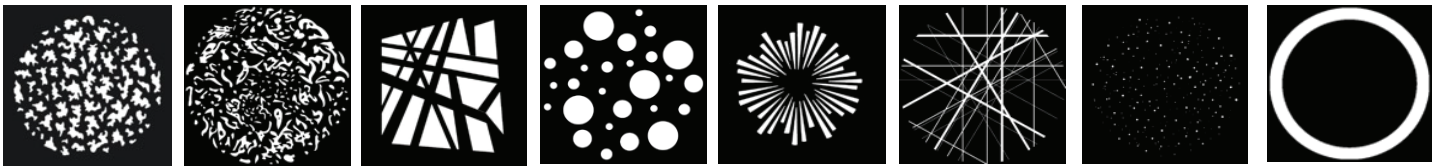

COLORS

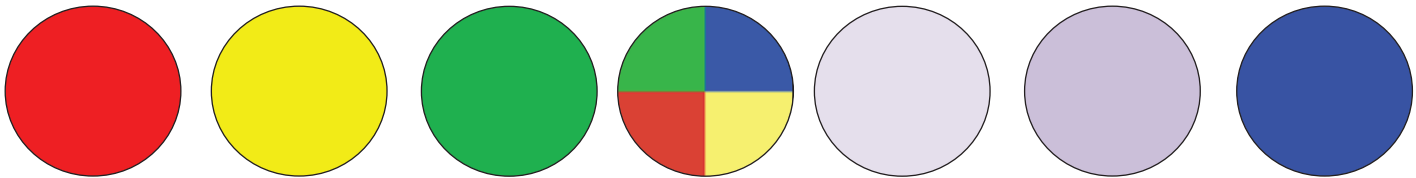

Red

Yellow

Green

Quad

High CRI 80

High CRI 90

Blue


PRISMS



4 Facet

6 Facet Linear

ANIMATION WHEEL

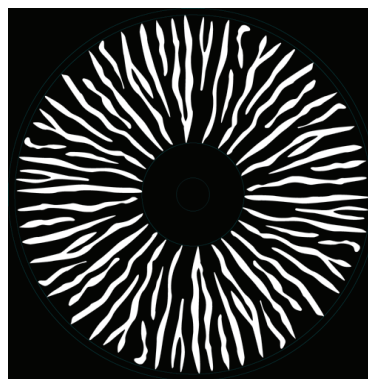

ORDERING INFORMATION

SKU (US)	SKU (EU)	ITEM
REB001	1237000298	Elation Rebel Profile
Pending	Pending	Elation Rebel Profile FIL
TOU027	Pending	Tour Link, 5pin, 10 ft, Tour Grade DMX Data Cable (other lengths available)





REBEL PROFILE



Compact 500W IP65 Framing Profile Fixture

SPECIFICATIONS

SOURCE

600W 6,500K Bright White Peak Field LED Engine
20,000 Hour Average LED Life*
*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

22000 Total Lumen Fixture Output
CRI 70+ (80 or 90 with HCRI Filter)
2:1 Hotspot Ratio
Zoom Range 3.5° - 51°
Beam Angle
Field Angle

EFFECTS

Motorized Zoom
4 Rotating Full Blackout Framing Blades
+/-60° Framing Module Index
Full 360° Bi-Directional Animation Wheel
4-Facet Round and 6 Facet Linear Rotating Prisms
2 Variable Frost Filters (Light and Wash)
Motorized Iris with Variable Pulse Effects
Variable 16-bit Dimming Curves
High Speed Electronic Shutter and Strobe
DMX Controllable LED Refresh Rate
Pan Angle: 540°
Tilt Angle: 270°
Continuous 360° Pan Rotation

COLOR

CMY Color Mixing
Linear CTO Color Correction (2400K)
7 Dichroic Colors, including CRI 80 and CRI90 filters

GOBOS

2 Gobo Wheels
7 Rotating Glass Gobos
8 Static Glass Gobos

CONTROL / CONNECTIONS

2 DMX Channel Modes
(5) Button Touch Control Panel
Full Color 180° Reversible LCD Menu Display
Hibernation Mode (Power Save)
Aria x2 Wireless Device Management
NFC Configuration
IP65 Locking 5pin XLR Connector In/Out
IP65 Locking RJ45 Ethernet Connector In/Out
IP65 Locking Power Connector In

SIZE / WEIGHT

Length: 15.65 in (398mm)
Width: 11.06 in (281mm)
Height: 26.2 in (666mm)
Center-to-Center Spacing: 23.2 in (589mm)
Weight: 66 lbs. (29.9 kg)

ELECTRICAL

AC 100-240V 50/60Hz
Max Power Consumption: 950W
-4° to 113°F (-20°C to 45°C)
3509 BTU/hr (+/- 10%)

INCLUDED ITEMS

Omega Brackets (x2)
Safety Cable
IP65 Rated Locking Power Cable

APPROVALS / RATINGS

CE | cETLus | FCC | UKCA | IP65





REBEL PROFILE



Compact 500W IP65 Framing Profile Fixture

DIMENSIONS

