



## KEY FEATURES

- IP65 for temporary outdoor applications
- (12) 60W RGBL LED Array
- Up to 14000 Total Lumens Fixture Output
- Pixel Control
- Calibrated Color Temperature Control
- Wide Zoom Range from 5° to 40°
- 360° continuous Pan and Tilt

The **REBEL WASH 12™** is a powerful IP65-rated LED wash for many interior and exterior applications.

Projecting up to 14000 lumens output from 12 60W RGBL emitters, the **REBEL WASH 12™** is the ideal work horse luminaire providing high output with powerful beams or wide washes, with excellent color quality. From intense primary colors to excellent white color quality with high CRI and calibrated color temperatures, the fixture is the perfect choice for a wide variety of applications. Pixel control or simple uniform access provide additional levels of excitement and effects, and the 360 degree endless Pan and Tilt rotation allows the fixture to add another layer of creativity.

With a fast zoom range from 5° to 40° out of a compact fixture design, the **REBEL WASH 12™** has the complete feature set for a wide variety of shows and events. Fully sealed from dust and water, it is a flexible fixture ready to perform in short-term outdoor applications or any indoor environment.



12x60W IP65 RGBL Wash Fixture

## SPECIFICATIONS

### SOURCE

(12) 60W RGBL LED  
30,000 Hour Average LED Life\*

\*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

### PHOTOMETRIC DATA

14000 Total Lumen Fixture Output  
CRI - 83.4  
TLCI - 67  
Zoom Range 5° - 40°  
Beam Angle: 5° - 40°  
Field Angle: 8.5° - 56.5°

### EFFECTS

Motorized Zoom  
Pixel Control  
Variable 16-bit Dimming Curves  
High Speed Electronic Shutter and Strobe  
DMX Controllable LED Refresh Rate  
Pan Angle: 360/540°  
Tilt Angle: 360/270°  
Continuous 360° Pan and Tilt Rotation

### COLOR

RGBL Color Array  
Variable CCT 2400K - 8500K  
Virtual Gel Swatch Book

### CONTROL / CONNECTIONS

3 DMX Channel Modes (21/28/68)  
DMX, RDM, Art-NET, sACN Protocol Support  
(4) Button Touch Control Panel  
Full Color 180° Reversible LCD Menu Display  
Hibernation Mode (Power Save)  
Aria x2 Wireless Device Management  
NFC Configuration  
IP65 Locking 5pin XLR Connector In/Out  
IP65 Locking RJ45 Ethernet Connector In/Out  
IP65 Locking Power Connector In

### SIZE / WEIGHT

Length: 14.2 in (361 mm)  
Width: 10.2 in (259 mm)  
Height: 17.5 in (445 mm)  
Weight: 36.4 lbs. (16.5 kg)

### ELECTRICAL

AC 100-240V 50/60Hz  
Max Power Consumption 730W  
Power Thru Capacity: 4A (0 units @ 115V, 1 unit @ 240V)  
-4° to 113°F (-20°C to 45°C)  
BTU/hr (+/- 10%): 2489.3

### INCLUDED ITEMS

Omega Brackets (x2)  
Safety Cable  
IP65 Rated Locking Power Cable

### APPROVALS / RATINGS

CE | cETLus | FCC | UKCA | IP65



## ORDERING INFORMATION


SKU (US)	SKU (EU)	DESCRIPTION
REB112	1237000395	Elation Rebel Wash 12





12x60W IP65 RGLB Wash Fixture

## UNIT DIMENSIONS

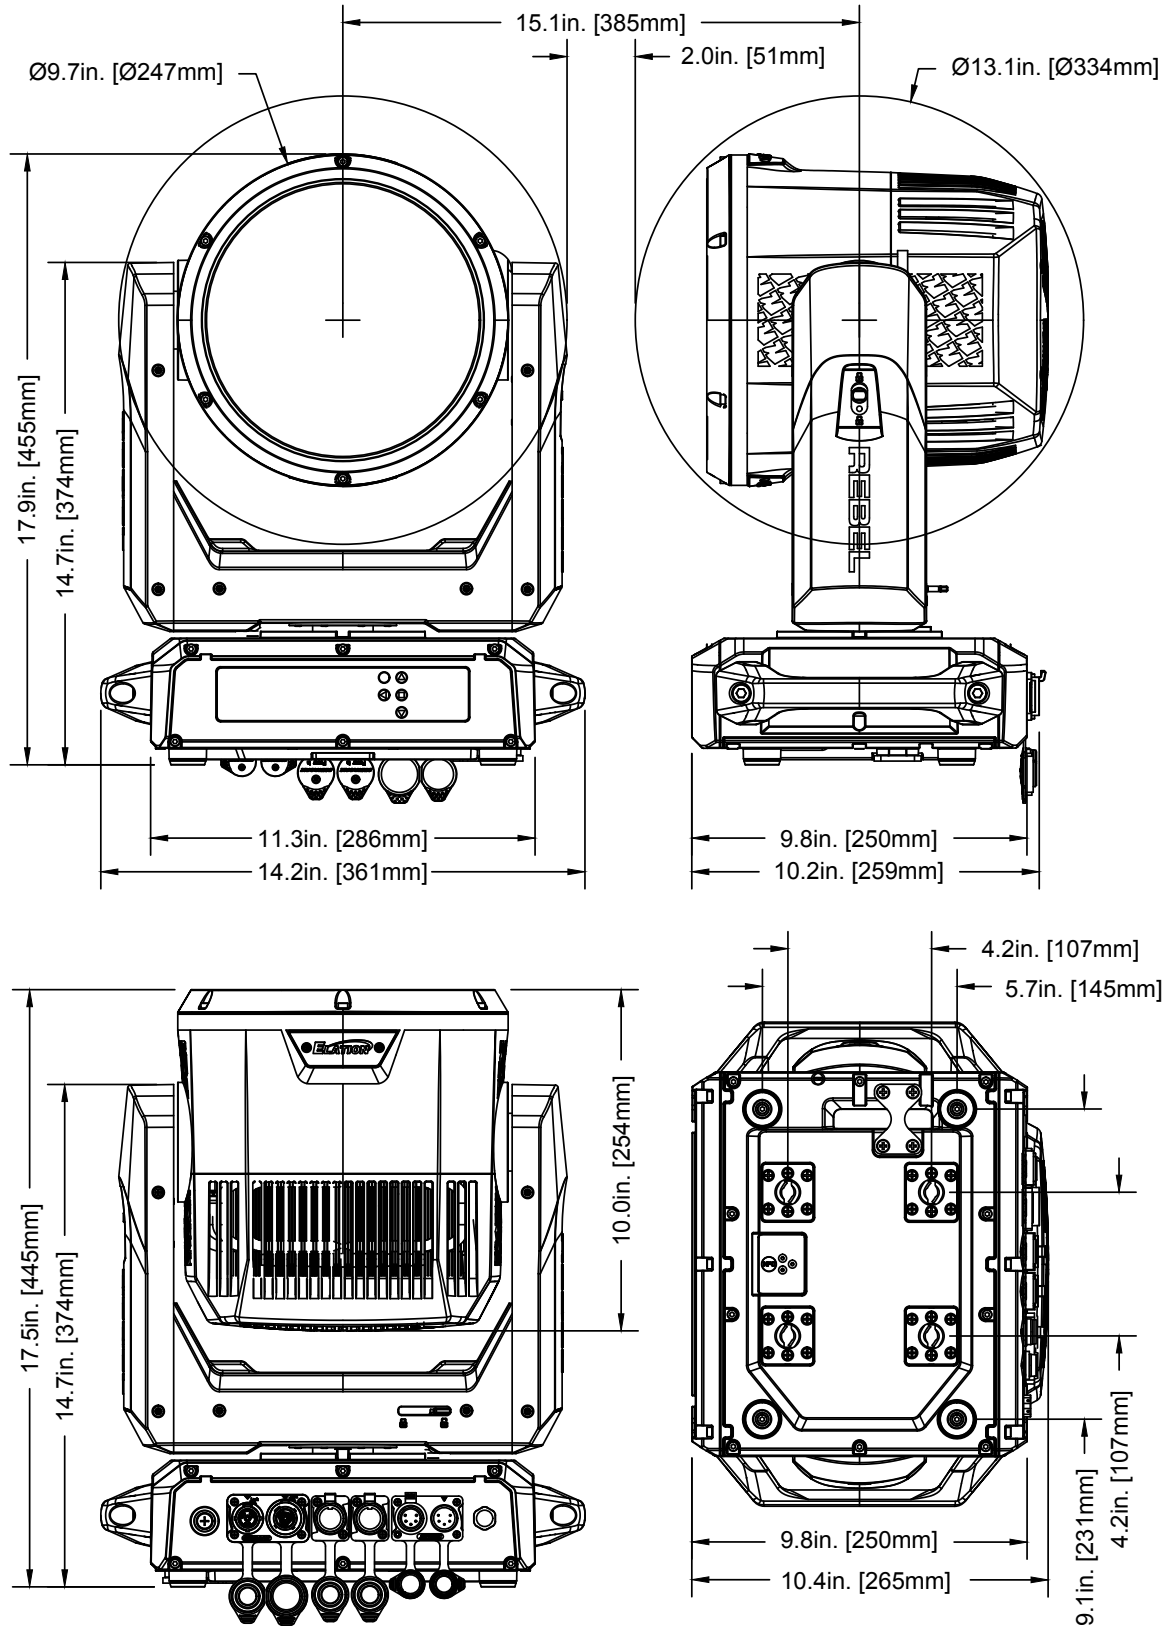



12x60W IP65 RGLB Wash Fixture

## LOGO PLATE DIMENSIONS

