


Light efficiency:



Light quality:



Color temperature:




Output: 3836 lm
Peak: 55192 cd
Power: 223.3 W
PF: 1.0




Product name:
Vizi Pix Z19 (Zoom 50%,3200K)
Item number:

Date and time:
5/4/2026 8:08:05 AM

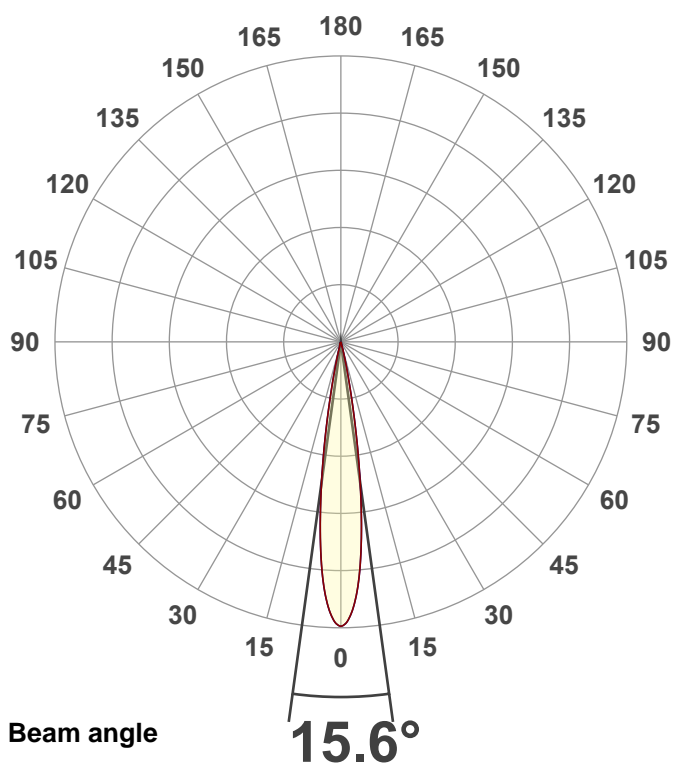


CIE 1931
x: 0.428
y: 0.411



Spectra

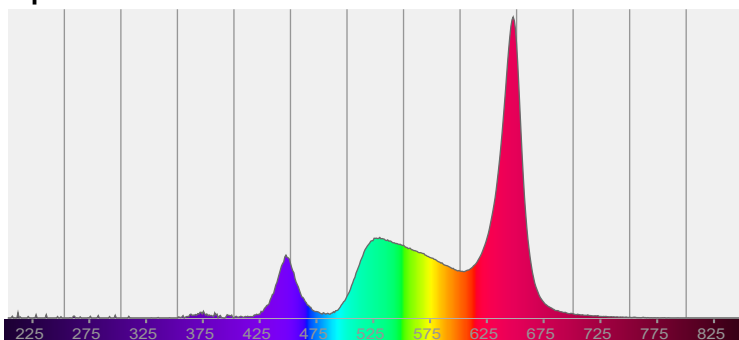


Power

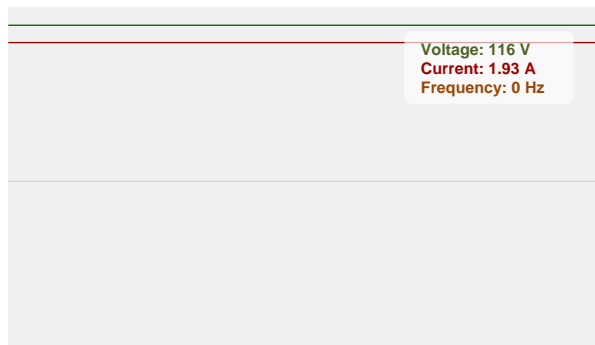


Color details

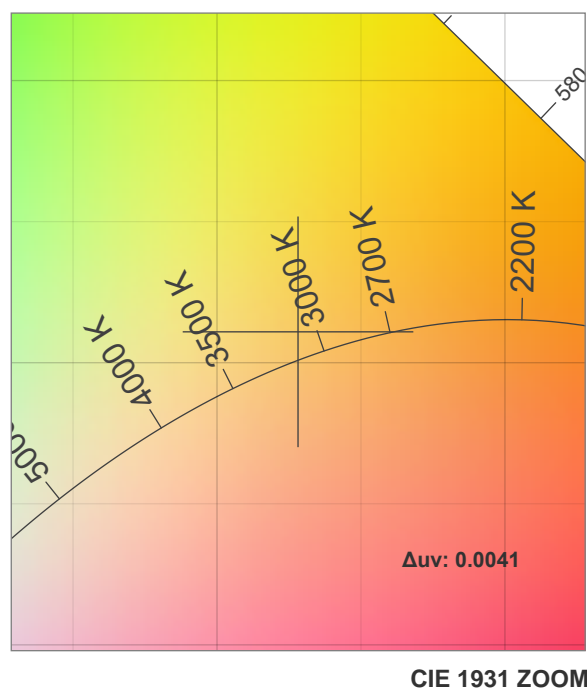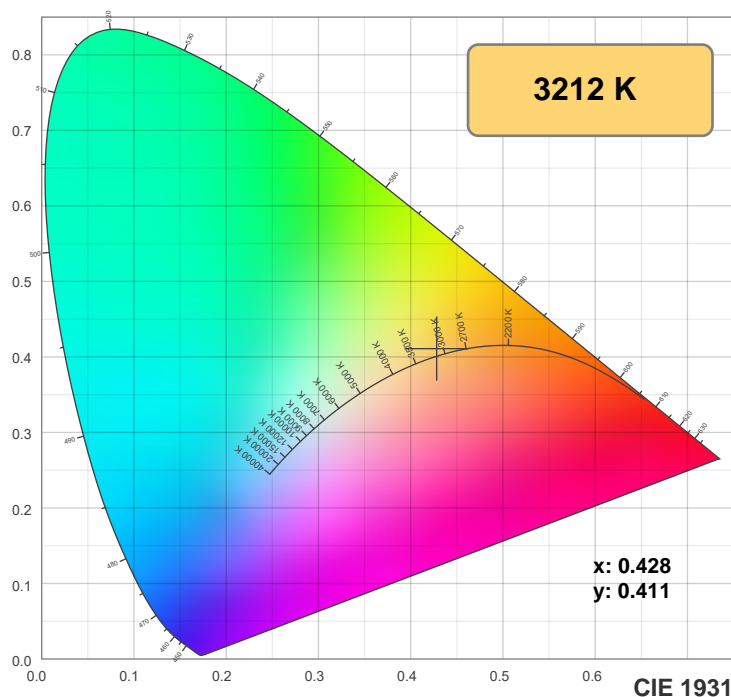

TM-30: 80.2

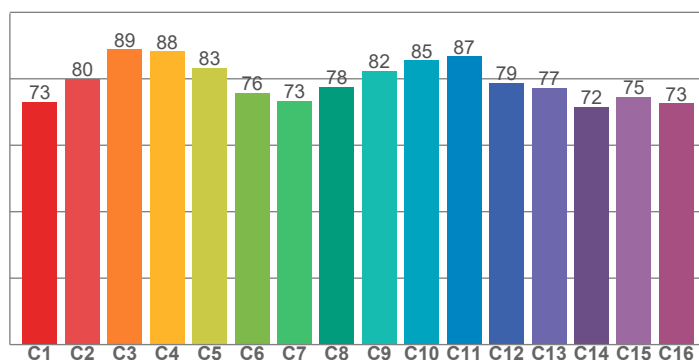

CRI: 72.6 (R1-R8)

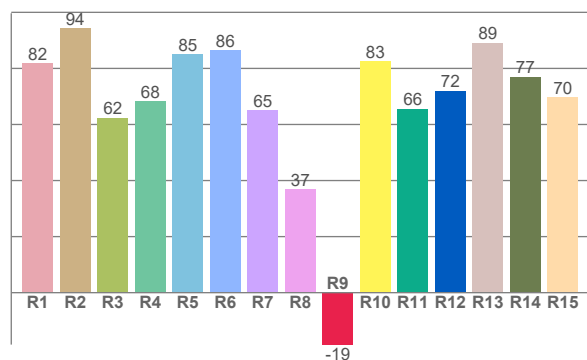

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.8	94.3	62.4	68.3	85.1	86.5	65.1	37.0	-18.5	82.6	65.6	72.0	89.1	77.0	69.7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
73.0	79.9	88.8	88.3	83.2	75.7	73.3	77.5	82.3	85.5	86.7	78.8	77.3	71.6	74.5	72.6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
86.4	91.1	85.9	88.7	78.2	70.4	84.5	90.6	81.6	92.7	88.2	81.1	76.4	87.8	92.6

CQS: 83.7

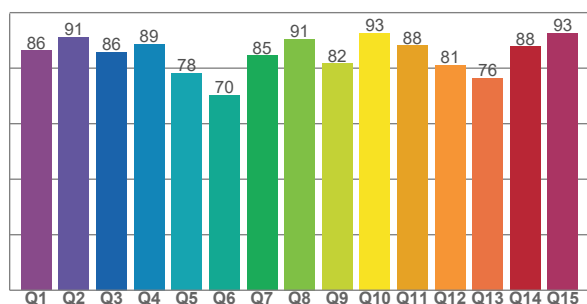

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3212 K	72.6	-18.5	80.2	115.3	83.7	0.428	0.411	0.242	0.349	0.0041

TM-30 details







Rf 80.2

Fidelity index Rf


Rg 115.3

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	73	13%	-6%
2	80	7%	-8%
3	89	4%	-2%
4	88	4%	6%
5	83	10%	8%
6	76	14%	5%
7	73	17%	-3%
8	78	8%	-12%
9	82	2%	-12%
10	85	-5%	-6%
11	87	-4%	7%
12	79	0%	14%
13	77	5%	17%
14	72	12%	22%
15	75	15%	8%
16	73	22%	0%

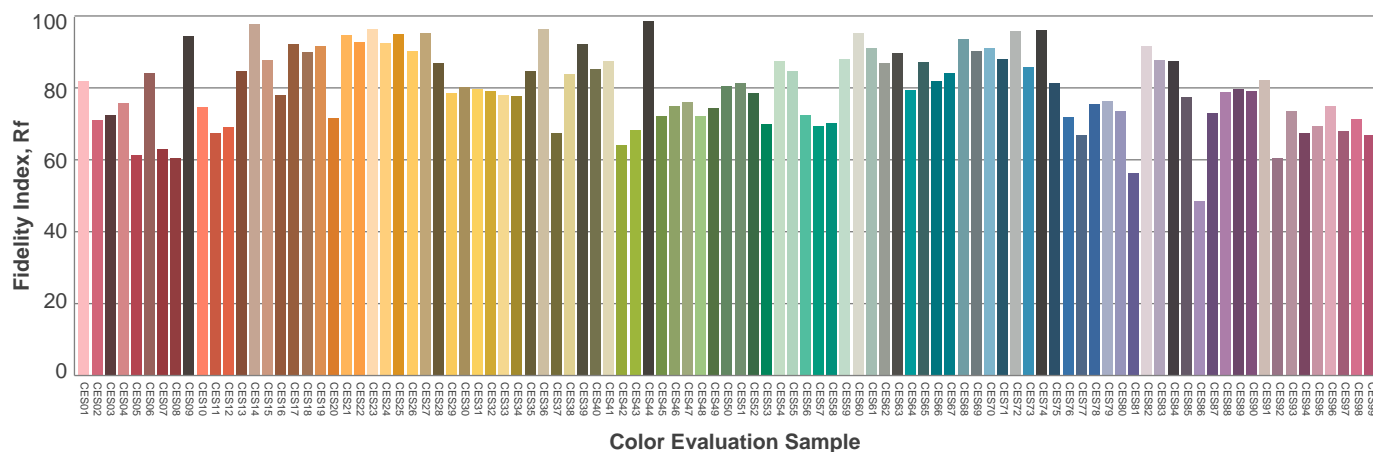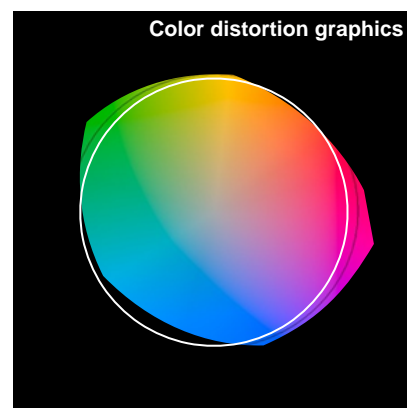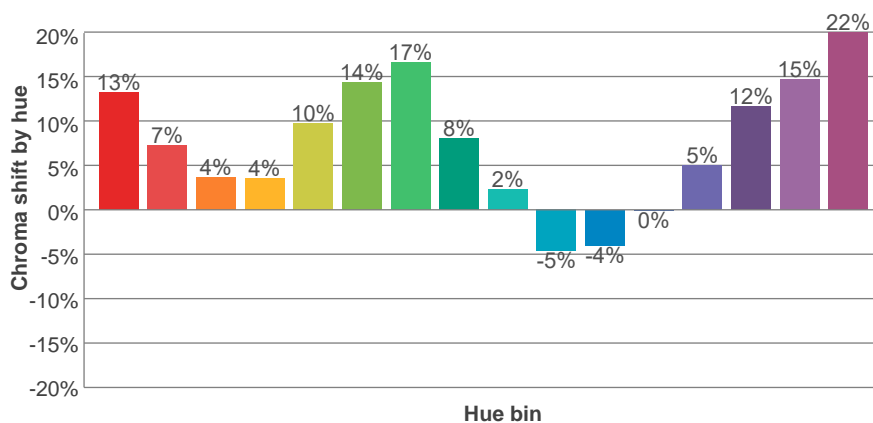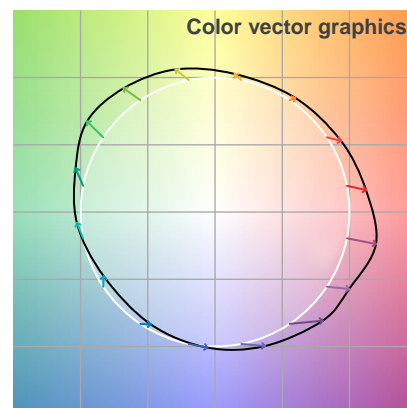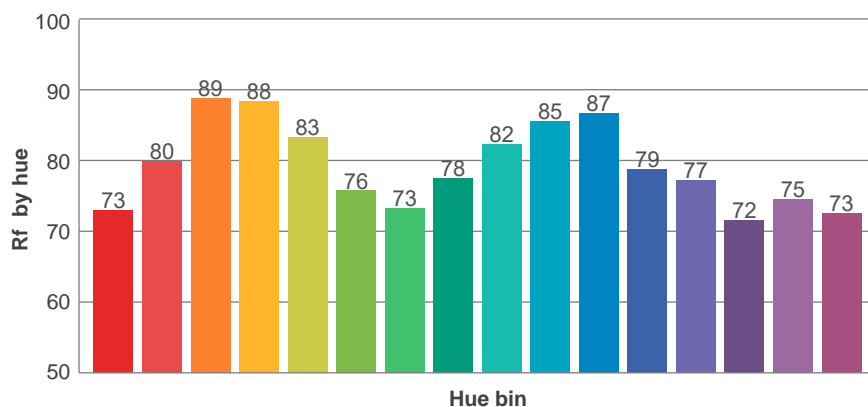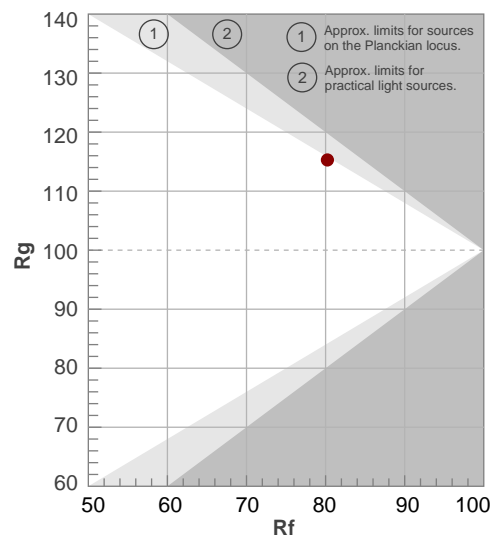

Beam details

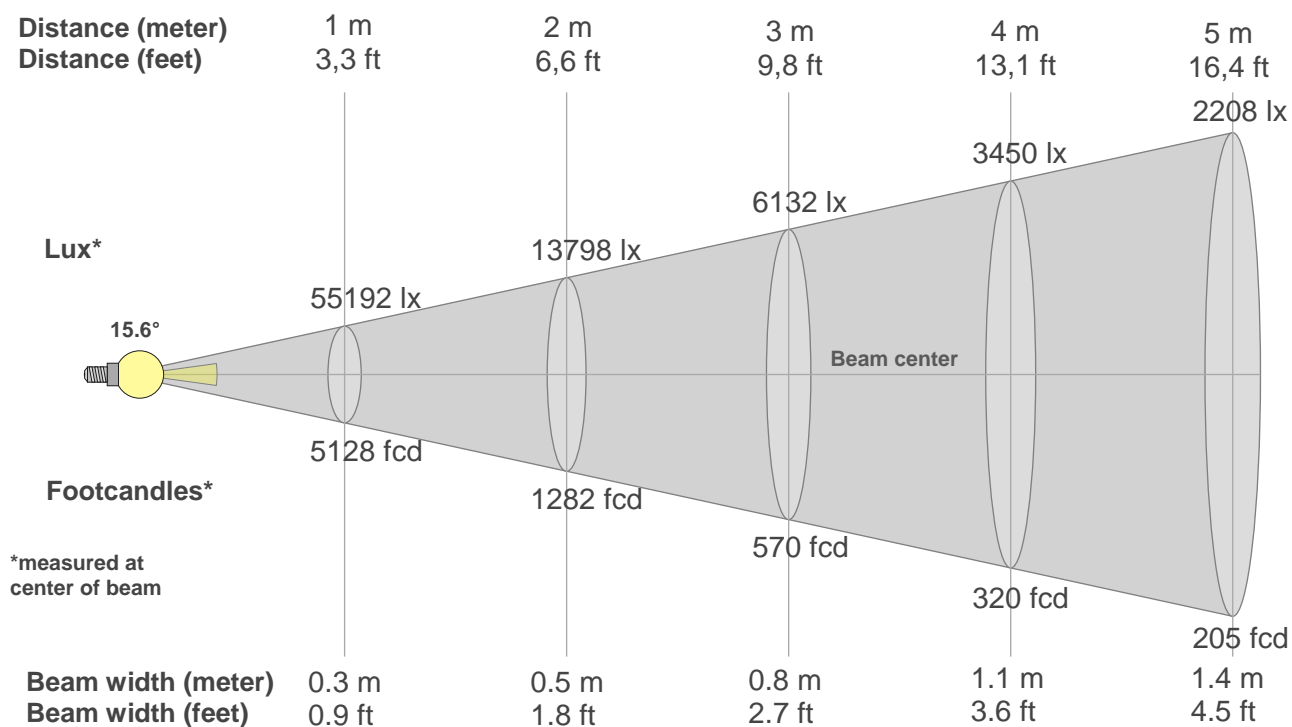

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
55192lx	13798lx	6132lx	3450lx	2208lx	1533lx	1126lx	862lx	681lx	552lx	456lx	383lx	327lx	282lx	245lx	216lx	191lx	170lx	153lx	138lx
5127.5fcd	1281.9fcd	569.7fcd	320.5fcd	205.1fcd	142.4fcd	104.6fcd	80.1fcd	63.3fcd	51.3fcd	42.4fcd	35.6fcd	30.3fcd	26.2fcd	22.8fcd	20fcd	17.7fcd	15.8fcd	14.2fcd	12.8fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
55.2k	54.7k	53.1k	50.8k	47.5k	43.2k	38.1k	32.4k	26.5k	20.6k	15.0k	10.2k	6.5k	3.9k	2.0k	0.8k	0.2k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	78%	69%	59%	48%	37%	27%	18%	12%	7%	4%	1%	0%	0%	0%	0%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
55.2k	54.7k	53.1k	50.8k	47.5k	43.2k	38.1k	32.4k	26.5k	20.6k	15.0k	10.2k	6.5k	3.9k	2.0k	0.8k	0.2k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	78%	69%	59%	48%	37%	27%	18%	12%	7%	4%	1%	0%	0%	0%	0%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
55.2k	54.7k	53.1k	50.8k	47.5k	43.2k	38.1k	32.4k	26.5k	20.6k	15.0k	10.2k	6.5k	3.9k	2.0k	0.8k	0.2k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	78%	69%	59%	48%	37%	27%	18%	12%	7%	4%	1%	0%	0%	0%	0%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
55.2k	54.7k	53.1k	50.8k	47.5k	43.2k	38.1k	32.4k	26.5k	20.6k	15.0k	10.2k	6.5k	3.9k	2.0k	0.8k	0.2k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	78%	69%	59%	48%	37%	27%	18%	12%	7%	4%	1%	0%	0%	0%	0%


Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
15.6°	24.7°	29°	100.0%	100.0%

Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

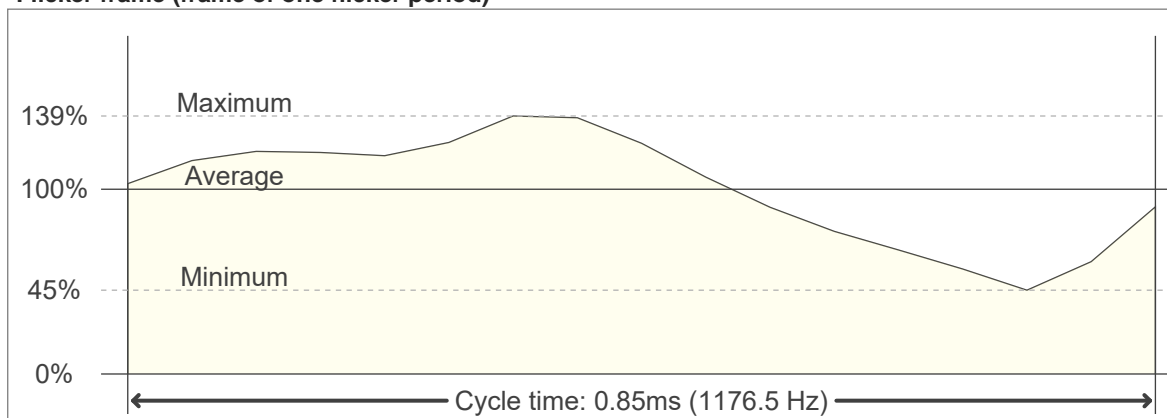

Flicker FFT (frequency scope of flicker curve)

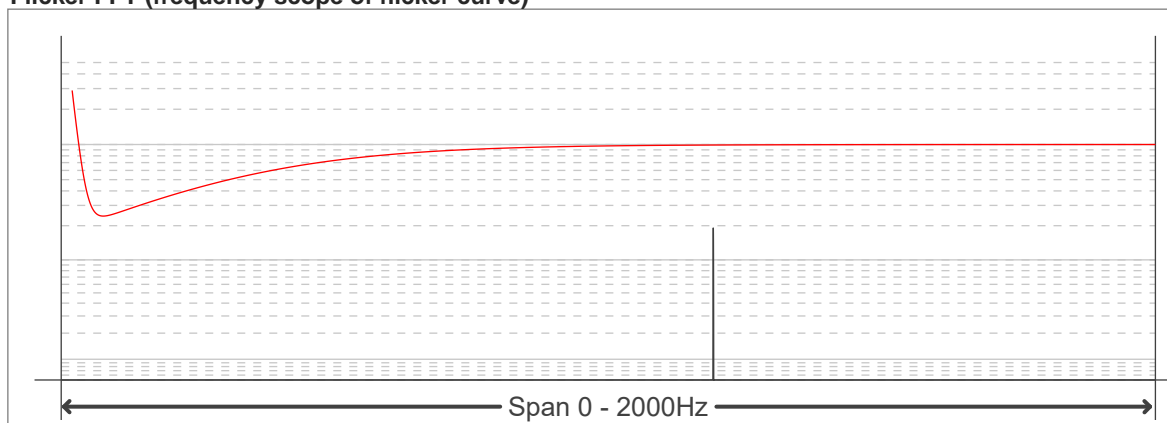

Flicker results:

Flicker frequency:		1176.47 Hz	
Flicker index:	0.12	JA8/10 40Hz	0.09 %
Flicker percentage:	58 %	JA8/10 90Hz	0.17 %
SVM: (Visual flicker)	0.39	JA8/10 200Hz	0.32 %
PstLM	0	JA8/10 400Hz	0.58 %
Mp	0.05	JA8/10 1000Hz	4.05 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------