



Light efficiency:


**54 Lumen/Watt**

Light quality:

**CRI: 75.0**

Color temperature:

**6629 K**

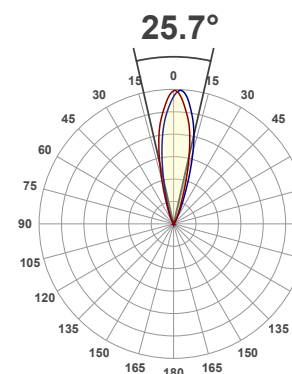

Product name:

**18P Hex**

Test:


**White**

Date:


**4/13/2017**

Output: 1479 lm Power consumption: 27.3 W Peak: 6589 cd


Spectral distribution

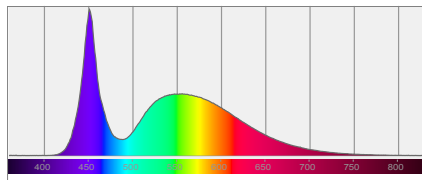


Color coordinates



Zoom color point




CRI R values

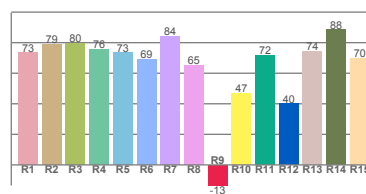

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
6629 K	75.0	-13.5	71.5	93.6	71.2	0.311	0.325	0.198	0.311	0.0015

## Beam details

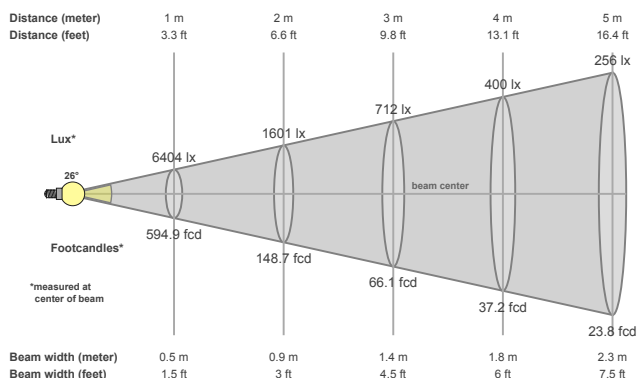

## Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
25.7°	45.2°	59.1°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
6589 cd	1.0%	1.0%

## Power

Power	Power factor	Power frequency
27.3 W	0.95	60 Hz

Nominal voltage	Voltage	Current
230 V	113 V	0.254 A

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
6404lx	1601lx	712lx	400lx	256lx	178lx	131lx	100lx	79lx	64lx	53lx	44lx	38lx	33lx	28lx	25lx	22lx	20lx	18lx	16lx
594.9fcd	148.7fcd	66.1fcd	37.2fcd	23.8fcd	16.5fcd	12.1fcd	9.3fcd	7.3fcd	5.9fcd	4.9fcd	4.1fcd	3.5fcd	3fcd	2.6fcd	2.3fcd	2.1fcd	1.8fcd	1.6fcd	1.5fcd